PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶:

G07F 7/10

(11) International Publication Number:

WO 97/41541

A1 |

(43) International Publication Date:

6 November 1997 (06.11.97)

(21) International Application Number:

PCT/US97/06940

(22) International Filing Date:

24 April 1997 (24.04.97)

(30) Priority Data:

26 April 1996 (26.04.96)	US
26 April 1996 (26.04.96)	US
26 April 1996 (26.04.96)	US
26 April 1996 (26.04.96)	US
	26 April 1996 (26.04.96) 26 April 1996 (26.04.96)

(71) Applicant (for all designated States except US): VERIFONE, INC. [US/US]; Suite 400, Three Lagoon Drive, Redwood City, CA 94065 (US).

(72) Inventors; and

- (75) Inventors/Applicants (for US only): WILLIAMS, Humphrey [GB/US]; 857 San Judeane, Palo Alto, CA 94306 (US). HUGHES, Kevin [US/US]; 33 Lyonridge Lane, San Mateo, CA 94402 (US). PARMAR, Bipinkumar, G. [IN/US]; 10554 Orange Tree Lane, Cupertino, CA 95014 (US).
- (74) Agent: WARREN, Sanford, E., Jr.; Warren, Perez & Stephens, Suite 710, Berkshire Court, 8411 Preston Road, Dallas, TX 75225 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published


With international search report.


Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: A SYSTEM, METHOD AND ARTICLE OF MANUFACTURE FOR NETWORK ELECTRONIC PAYMENT AND CREDIT COLLECTION UTILIZING A PAYMENT INSTRUMENT HOLDER

(57) Abstract

An electronic monetary system provides for transactions utilizing an electronic-monetary system that emulates a wallet or a purse that is customarily used for keeping money, credit cards and other forms of payment organized. Access to the instruments in the wallet or purse is restricted by a password to avoid unauthorized payments. When access is authorized, a graphical representation of the payment instruments is presented on the display to enable a user to select a payment method of their choice. Once a payment instrument is selected, a summary of the goods for purchase are presented to the user and the user enters his/her electronic approval for the transaction or cancels the transaction. Electronic approval results in the generation of an electronic transaction to complete the order.





FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

	• • •						, ,
AL	Albania '	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	
AT	Austria	FR	France	LU	Luxembourg	SN	Slovakia
ΑÜ	Australia	GA	Gabon	LV	l.atvia		Senegal
ΑZ	Azerbaijan	GB	United Kingdom	MC	Monaco	SZ	Swaziland
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TD	Chad ·
BB	Barbados	GH	Ghana	MG	Madagascar	TG	Togo
BE	Belgium	GN	Guinea	MK	-	TJ	Tajikistan
BF	Burkina Faso	GR	Greece	LYJAK	The former Yugoslav	TM	Turkmenistan
BG	Bulgaria	HU	Hungary	ML	Republic of Macedonia	TR	Turkey
BJ	Benin	IE	Ireland		Mali	TT	Trinidad and Tobago
BR	Brazil	IL	israel	MN	Mongolia	UA	Ukraine
BY	Belarus	IS	Iceland	MR	Mauritania	UG	Uganda
CA	Canada	IT	Italy	MW	Malawi	us	United States of America
CF	Central African Republic	JP	лагу Јарал	MX	Mexico	UZ	Uzbekistan
CG	Congo	KE		NE	Niger	VN	Viet Nam
CH	Switzerland	KG	Kenya	NL	Netherlands	YU	Yugoslavia
CI	Côte d'Ivoire		Kyrgyzstan	NO	Norway	zw	Zimbabwe
CM	Cameroon	KP	Democratic People's	NZ	New Zealand		
en	China		Republic of Korea	PL,	Poland		
CU		KR	Republic of Korea	PT	Portugal		
CZ	Cuba	KZ	Kazakstan	RO	Romania		
	Czech Republic	. LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

n9/623641

533 Rec'd PCT/PTO 0 6 SEP 2000

A SYSTEM, METHOD AND ARTICLE OF MANUFACTURE FOR NETWORK ELECTRONIC PAYMENT AND CREDIT COLLECTION UTILIZING A PAYMENT INSTRUMENT HOLDER

5

10

15

20

25

Field Of The Invention

The present invention relates to the electronic payment in exchange for goods and services purchased over a communication network, and more specifically, it relates to an ergonomic, graphical user network interface which simulates a real life transaction for the credit card, cash or other payment of goods.

Background of the Invention

The present invention relates to an electronic graphical representation of a monetary system for implementing electronic money payments as an alternative medium of economic exchange to cash, checks, credit and debit cards, and electronic funds transfer. The Electronic-Monetary System is a hybrid of currency, check, card payment systems, and electronic funds transfer systems, possessing many of the benefits of these systems with few of their limitations. The system utilizes electronic representations of money which are designed to be universally accepted and exchanged as economic value by subscribers of the monetary system.

Today, approximately 350 billion coin and currency transactions occur between individuals and institutions every year. The extensive use of coin and currency transactions has limited the automation of individual transactions such as purchases, fares, and bank account deposits and withdrawals. Individual cash transactions are burdened by the need to have the correct amount of cash or providing change therefor. Furthermore, the handling and managing of paper cash and

10

15

20

25

coins is inconvenient, costly and time consuming for both individuals and financial institutions.

Although checks may be written for any specific amount up to the amount available in the account, checks have very limited transferability and must be supplied from a physical inventory. Paper-based checking systems do not offer sufficient relief from the limitations of cash transactions, sharing many of the inconveniences of handling currency while adding the inherent delays associated with processing checks. To this end, economic exchange has striven for greater convenience at a lower cost, while also seeking improved security.

Automation has achieved some of these qualities for large transactions through computerized electronic funds transfer ("EFT") systems. Electronic funds transfer is essentially a process of value exchange achieved through the banking system's centralized computer transactions. EFT services are a transfer of payments utilizing electronic "checks," which are used primarily by large commercial organizations.

The Automated Clearing House (ACH) where a user can enter a preauthorized code and download information with billing occurring later, and a Point Of Sale (POS) system where a transaction is processed by connecting with a central computer for authorization for the transaction granted or denied immediately are examples of EFT systems that are utilized by retail and commercial organizations. However, the payments made through these types of EFT systems are limited in that they cannot be performed without the banking system.

Moreover, ACH transactions usually cannot be performed during off
business hours.

- Home Banking bill payment services are examples of an EFT system used by individuals to make payments from a home computer.

 Currently, home banking initiatives have found few customers. Of the banks that have offered services for payments, account transfers and information over the telephone lines using personal computers, less than one percent of the bank's customers are using the service. One reason that Home Banking has not been a successful product is because the customer cannot deposit and withdraw money as needed in this type of system.
- 15 Current EFT systems, credit cards, or debit cards, which are used in conjunction with an on-line system to transfer money between accounts, such as between the account of a merchant and that of a customer, cannot satisfy the need for an automated transaction system providing an ergonomic interface. Examples of EFT systems
 20 which provide non-ergonomic interfaces are disclosed in US Patents Numbers 5,476,259; 5,459,304; 5,452,352; 5,448,045; 5,478,993; 5,455,407; 5,453,601; 5,465,291; and 5,485,510.

To implement an automated, convenient transaction that can
dispense some form of economic value, there has been a trend
towards off-line payments. For example, numerous ideas have been
proposed for some form of "electronic money" that can be used in
cashless payment transactions as alternatives to the traditional

-4-

currency and check types of payment systems. See U.S. Pat. No. 4,977,595, entitled "METHOD AND APPARATUS FOR IMPLEMENTING ELECTRONIC CASH," and U.S. Pat. No. 4,305,059, entitled "MODULAR FUNDS TRANSFER SYSTEM."

5

10

The more well known techniques include magnetic stripe cards purchased for a given amount and from which a prepaid value can be deducted for specific purposes. Upon exhaustion of the economic value, the cards are thrown away. Other examples include memory cards or so called smart cards which are capable of repetitively storing information representing value that is likewise deducted for specific purposes.

While the art pertaining to cash alternatives for transactions is a well developed one, there is a substantial need for a more user friendly sstem and method for such transactions. Thus, there is a need for a system that allows a user to interface with a display that looks and feels natural. Of particular importance is the ease of acceptance resulting from the similarity to accepted norms of payment.

20

25

15

Summary of an exemplary embodiment

In accordance with these and other objects of the invention, a brief summary of the present invention is presented. Some simplifications and omissions may be made in the following summary, which is intended to highlight and introduce some aspects of the present invention, but not to limit its scope. Detailed descriptions of a preferred, exemplary embodiment adequate to allow one of ordinary

10

15

skill in the art to make and use the inventive concepts will follow in later sections.

According to a broad aspect of the invention, an electronic monetary system provides for transactions utilizing a preferred embodiment in the form of an electronic-monetary system that emulates a wallet, a purse, a smart card, a pocketbook, a checkbook, a satchel or other payment instrument holder that is customarily used for storing money, credit cards and other payment instruments. Access to the wallet is restricted by a password, which can be encrypted, or used to generate an encryption key for restricting access to sensitive information, to avoid unauthorized payments. When access is authorized, a graphical representation (bitmap) of the instrument(s) is presented on the display to enable a user to select a payment instrument. Once a payment instrument is selected, a summary of the goods for purchase are presented to the user and the user enters their electronic approval for the transaction or cancels the transaction. Electronic approval results in the generation of an electronic transaction to complete the order.

Brief Description of the Drawings

The foregoing and other objects, aspects and advantages are better understood from the following detailed description of a preferred embodiment of the invention with reference to the drawings, in which:

Figure 1A is a block diagram of a representative hardware environment in accordance with a preferred embodiment;

Figure 1B is a block diagram of the system in accordance with a preferred embodiment;

Figure 2 provides an alternative preferred embodiment in accordance with a Java based implementation of the invention;

15

5

Figure 3 is an architecture block diagram in accordance with a preferred embodiment of the subject invention;

Figure 4 presents the detailed logic associated with the payment manager in accordance with a preferred embodiment;

Figure 5 is a Consumer Payment Message Sequence Diagram in accordance with a preferred embodiment of the invention;

Figure 6 is a flowchart setting forth the detailed logic of a paywindow user interface in accordance with a preferred embodiment of the invention;

- Figure **7** is a flowchart of the detailed logic associated with the administration mode of the paywindow in accordance with a preferred embodiment;
- Figure **8** is a flowchart of administration mode processing associated with register and report processing in accordance with a preferred embodiment;
 - Figure **9** is an illustration of a paywindow display in accordance with a preferred embodiment;
 - Figure **10** illustrates a list of payment methods for a user to select from in accordance with a preferred embodiment;
- Figure 11 is an authorization display screen in accordance with a preferred embodiment;
 - Figure **12** is a PAID authorization display screen in accordance with a preferred embodiment;

Figure 13 is a cancellation of authorization display screen in accordance with a preferred embodiment;

Figure 14 illustrates a Main screen in accordance with a preferred embodiment of the invention;

Figure 15 is an illustration of an Administration display screen in accordance with a preferred embodiment;

10

Figure 16 illustrates a display of the wallet administration page in accordance with a preferred embodiment;

Figure 17 is a payment administration window in accordance with a preferred embodiment;

Figure 18 is an illustration of the administration preferences page in accordance with a preferred embodiment;

Figure 19 illustrates the window controls in accordance with a preferred embodiment;

Figure 20 is a register display in accordance with a preferred embodiment of the invention;

Figure 21 is register detail display in accordance with a preferred embodiment;

Figure **22** is a register find display in accordance with a preferred embodiment;

Figure 23 is a register customize display in accordance with a preferred embodiment;

10

Figure 24 is a register output display for directing the output target for register information;

Figure **25** is a report of a wallet in accordance with a preferred embodiment;

Figure **26** illustrates a report customize display in accordance with a preferred embodiment;

Figure **27** is a report output display in accordance with a preferred embodiment;

Figure 28 illustrates a set of images illustrating "open" and "closed" icons for payment holders in accordance with a preferred embodiment;

Figure 29 is an illustration of a certificate issuance form in accordance with a preferred embodiment;

Figure 30 illustrates a certificate issuance response in accordance with a preferred embodiment;

Figure 31 illustrates a collection of payment instrument holders in accordance with a preferred embodiment;

Figure 32 illustrates the default payment instrument bitmap in accordance with a preferred embodiment;

15

5

Figure 33 illustrates a selected payment instrument with a fill in the blanks for the cardholder in accordance with a preferred embodiment; and

Figure 34 illustrates a coffee purchase utilizing the newly defined VISA card in accordance with a preferred embodiment of the invention.

those mentioned.

A preferred embodiment of a system in accordance with the present invention is preferably practiced in the context of a personal computer such as the IBM PS/2, Apple Macintosh computer or UNIX based workstation. A representative hardware environment is depicted in Figure 1A, which illustrates a typical hardware configuration of a workstation in accordance with a preferred embodiment having a central processing unit 110, such as a microprocessor, and a number of other units interconnected via a system bus 112. The workstation shown in Figure 1 includes a Random Access Memory (RAM) 114, 10 Read Only Memory (ROM) 116, an I/O adapter 118 for connecting peripheral devices such as disk storage units 120 to the bus 112, a user interface adapter 122 for connecting a keyboard 124, a mouse 126, a speaker 128, a microphone 132, and/or other user interface devices such as a touch screen (not shown) to the bus 112, 15 communication adapter 134 for connecting the workstation to a communication network (e.g., a data processing network) and a display adapter 136 for connecting the bus 112 to a display device **138**. The workstation typically has resident thereon an operating system such as the Microsoft Windows Operating System (OS), the 20 IBM OS/2 operating system, the MAC OS, or UNIX operating system. Those skilled in the art will appreciate that the present invention may also be implemented on platforms and operating systems other than

A preferred embodiment is written using JAVA, C, and the C++ language and utilizes object oriented programming methodology.

Object oriented programming (OOP) has become increasingly used to develop complex applications. As OOP moves toward the mainstream of software design and development, various software solutions will

need to be adapted to make use of the benefits of OOP. A need exists for these principles of OOP to be applied to a messaging interface of an electronic messaging system such that a set of OOP classes and objects for the messaging interface can be provided.

5

10

15

OOP is a process of developing computer software using objects, including the steps of analyzing the problem, designing the system, and constructing the program. An object is a software package that contains both data and a collection of related structures and procedures. Since it contains both data and a collection of structures and procedures, it can be visualized as a self-sufficient component that does not require other additional structures, procedures or data to perform its specific task. OOP, therefore, views a computer program as a collection of largely autonomous components, called objects, each of which is responsible for a specific task. This concept of packaging data, structures, and procedures together in one component or module is called encapsulation.

In general, OOP components are reusable software modules which
present an interface that conforms to an object model and which are
accessed at run-time through a component integration architecture.
A component integration architecture is a set of architecture
mechanisms which allow software modules in different process spaces
to utilize each others capabilities or functions. This is generally done
by assuming a common component object model on which to build the
architecture.

WO 97/41541 PCT/US97/06940

-13-

It is worthwhile to differentiate between an object and a class of objects at this point. An object is a single instance of the class of objects, which is often just called a class. A class of objects can be viewed as a blueprint, from which many objects can be formed.

5

10

15

20

25

OOP allows the programmer to create an object that is a part of another object. For example, the object representing a piston engine is said to have a composition-relationship with the object representing a piston. In reality, a piston engine comprises a piston, valves and many other components; the fact that a piston is an element of a piston engine can be logically and semantically represented in OOP by two objects.

OOP also allows creation of an object that "depends from" another object. If there are two objects, one representing a piston engine and the other representing a piston engine wherein the piston is made of ceramic, then the relationship between the two objects is not that of composition. A ceramic piston engine does not make up a piston engine. Rather it is merely one kind of piston engine that has one more limitation than the piston engine; its piston is made of ceramic. In this case, the object representing the ceramic piston engine is called a derived object, and it inherits all of the aspects of the object representing the piston engine and adds further limitation or detail to it. The object representing the ceramic piston engine "depends from" the object representing the piston engine. The relationship between these objects is called inheritance.


10

15

When the object or class representing the ceramic piston engine inherits all of the aspects of the objects representing the piston engine, it inherits the thermal characteristics of a standard piston defined in the piston engine class. However, the ceramic piston engine object overrides these ceramic specific thermal characteristics, which are typically different from those associated with a metal piston. It skips over the original and uses new functions related to ceramic pistons. Different kinds of piston engines will have different characteristics, but may have the same underlying functions associates with it (e.g., how many pistons in the engine, ignition sequences, lubrication, etc.). To access each of these functions in any piston engine object, a programmer would call the same functions with the same names, but each type of piston engine may have different/overriding implementations of functions behind the same name. This ability to hide different implementations of a function behind the same name is called polymorphism and it greatly simplifies communication among objects.

With the concepts of composition-relationship, encapsulation,
inheritance and polymorphism, an object can represent just about
anything in the real world. In fact, our logical perception of the reality
is the only limit on determining the kinds of things that can become
objects in object-oriented software. Some typical categories are as
follows:

Objects can represent physical objects, such as automobiles in a traffic-flow simulation, electrical components in a circuit-design program, countries in an economics model, or aircraft in an air-traffic-control system.

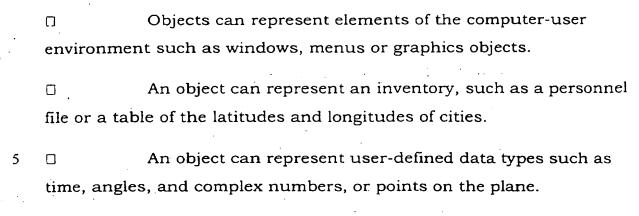

With this enormous capability of an object to represent just about any logically separable matters, OOP allows the software developer to design and implement a computer program that is a model of some aspects of reality, whether that reality is a physical entity, a process, a system, or a composition of matter. Since the object can represent anything, the software developer can create an object which can be used as a component in a larger software project in the future.

15

20

10

If 90% of a new OOP software program consists of proven, existing components made from preexisting reusable objects, then only the remaining 10% of the new software project has to be written and tested from scratch. Since 90% already came from an inventory of extensively tested reusable objects, the potential domain from which an error could originate is 10% of the program. As a result, OOP enables software developers to build objects out of other, previously built, objects.


This process closely resembles complex machinery being built out of assemblies and sub-assemblies. OOP technology, therefore, makes software engineering more like hardware engineering in that software

is built from existing components, which are available to the developer as objects. All this adds up to an improved quality of the software as well as an increased speed of its development.

Programming languages are beginning to fully support the OOP .. 5 principles, such as encapsulation, inheritance, polymorphism, and composition-relationship. With the advent of the C++ language, many commercial software developers have embraced OOP. C++ is an OOP language that offers a fast, machine-executable code. Furthermore, C++ is suitable for both commercial-application and systems-10 programming projects. For now, C++ appears to be the most popular choice among many OOP programmers, but there is a host of other OOP languages, such as Smalltalk, common lisp object system (CLOS), and Eiffel. Additionally, OOP capabilities are being added to more traditional popular computer programming languages such as 15 Pascal.

The benefits of object classes can be summarized, as follows:

- Objects and their corresponding classes break down complex \Box programming problems into many smaller, simpler problems. 20
 - Encapsulation enforces data abstraction through the organization of data into small, independent objects that can communicate with each other. Encapsulation protects the data in an object from accidental damage, but allows other objects to interact with that data by calling the object's member functions and
- 25 structures.

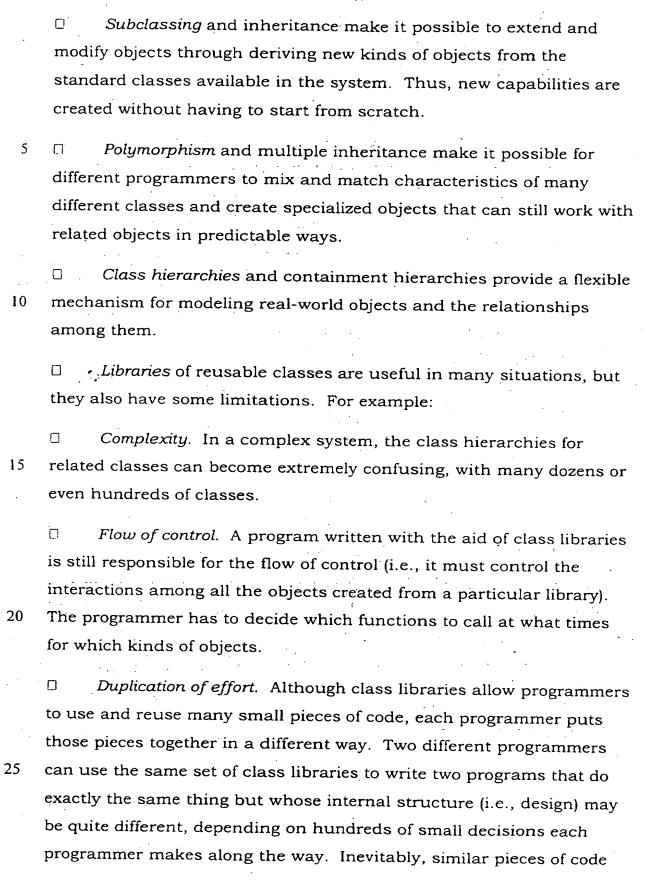

end up doing similar things in slightly different ways and do not work as well together as they should.

Class libraries are very flexible. As programs grow more complex, more programmers are forced to reinvent basic solutions to basic problems over and over again. A relatively new extension of the class library concept is to have a framework of class libraries. This framework is more complex and consists of significant collections of collaborating classes that capture both the small scale patterns and major mechanisms that implement the common requirements and design in a specific application domain. They were first developed to free application programmers from the chores involved in displaying menus, windows, dialog boxes, and other standard user interface elements for personal computers.

15

20

5

10

Frameworks also represent a change in the way programmers think about the interaction between the code they write and code written by others. In the early days of procedural programming, the programmer called libraries provided by the operating system to perform certain tasks, but basically the program executed down the page from start to finish, and the programmer was solely responsible for the flow of control. This was appropriate for printing out paychecks, calculating a mathematical table, or solving other problems with a program that executed in just one way.

25

The development of graphical user interfaces began to turn this procedural programming arrangement inside out. These interfaces allow the user, rather than program logic, to drive the program and

decide when certain actions should be performed. Today, most personal computer software accomplishes this by means of an event loop which monitors the mouse, keyboard, and other sources of external events and calls the appropriate parts of the programmer's code according to actions that the user performs. The programmer no longer determines the order in which events occur. Instead, a program is divided into separate pieces that are called at unpredictable times and in an unpredictable order. By relinquishing control in this way to users, the developer creates a program that is much easier to use. Nevertheless, individual pieces of the program written by the developer still call libraries provided by the operating system to accomplish certain tasks, and the programmer must still, determine the flow of control within each piece after it's called by the event loop. Application code still "sits on top of" the system.

15

25

10

Even event loop programs require programmers to write a lot of code that should not need to be written separately for every application. The concept of an application framework carries the event loop concept further. Instead of dealing with all the nuts and bolts of constructing basic menus, windows, and dialog boxes and then making these things all work together, programmers using application frameworks start with working application code and basic user interface elements in place. Subsequently, they build from there by replacing some of the generic capabilities of the framework with the specific capabilities of the intended application.

Application frameworks reduce the total amount of code that a programmer has to write from scratch. However, because the framework is really a generic application that displays windows,

supports copy and paste, and so on, the programmer can also relinquish control to a greater degree than event loop programs permit. The framework code takes care of almost all event handling and flow of control, and the programmer's code is called only when the framework needs it (e.g., to create or manipulate a proprietary data structure).

A programmer writing a framework program not only relinquishes control to the user (as is also true for event loop programs), but also relinquishes the detailed flow of control within the program to the framework. This approach allows the creation of more complex systems that work together in interesting ways, as opposed to isolated programs, having custom code, being created over and over again for similar problems.

15

20

10

5

Thus, as is explained above, a framework basically is a collection of cooperating classes that make up a reusable design solution for a given problem domain. It typically includes objects that provide default behavior (e.g., for menus and windows), and programmers use it by inheriting some of that default behavior and overriding other behavior so that the framework calls application code at the appropriate times.

There are three main differences between frameworks and class libraries:

25 Behavior versus protocol. Class libraries are essentially collections of behaviors that you can call when you want those individual behaviors in your program. A framework, on the other hand, provides not only behavior but also the protocol or set of rules

that govern the ways in which behaviors can be combined, including rules for what a programmer is supposed to provide versus what the framework provides.

- Call versus override. With a class library, the code the programmer instantiates objects and calls their member functions. It's possible to instantiate and call objects in the same way with a framework (i.e., to treat the framework as a class library), but to take full advantage of a framework's reusable design, a programmer typically writes code that overrides and is called by the framework.
- The framework manages the flow of control among its objects. Writing a program involves dividing responsibilities among the various pieces of software that are called by the framework rather than specifying how the different pieces should work together.
- Implementation versus design. With class libraries,

 programmers reuse only implementations, whereas with frameworks, they reuse design. A framework embodies the way a family of related programs or pieces of software work. It represents a generic design solution that can be adapted to a variety of specific problems in a given domain. For example, a single framework can embody the way a user interface works, even though two different user interfaces created with the same framework might solve quite different interface problems.

Thus, through the development of frameworks for solutions to various problems and programming tasks, significant reductions in the design and development effort for software can be achieved.

A preferred embodiment of the invention utilizes HyperText Markup Language (HTML) to implement documents on the Internet. HTML is a simple data format used to create hypertext documents that are portable from one platform to another. HTML documents are SGML documents with generic semantics that are appropriate for representing information from a wide range of domains. HTML has been in use by the World-Wide Web global information initiative since 1990. HTML is an application of ISO Standard 8879:1986 Information Processing Text and Office Systems; Standard Generalized Markup Language (SGML).

- To date, Web development tools have been limited in their ability to create dynamic Web applications which span from client to server and interoperate with existing computing resources. Until recently, HTML has been the dominant technology used in development of Web-based solutions. However, HTML has proven to be inadequate in the
- 15 following areas:
 - o Poor performance;
 - o Restricted user interface capabilities;
 - o Can only produce static Web pages;
 - o Lack of interoperability with existing applications and data; and
- 20 o Inability to scale.

Sun Microsystem's Java language solves many of the client-side problems by:

- Improving performance on the client side;
- Enabling the creation of dynamic, real-time Web applications;
- 25 and

15

20

25

o Providing the ability to create a wide variety of user interface components.

With Java, developers can create robust User Interface (UI) components. Custom "widgets" (e.g. real-time stock tickers, animated icons, etc.) can be created, and client-side performance is improved. Unlike HTML, Java supports the notion of client-side validation, offloading appropriate processing onto the client for improved performance. Dynamic, real-time Web pages can be created. Using the above-mentioned custom UI components, dynamic Web pages can also be created.

Sun's Java language has emerged as an industry-recognized language for "programming the Internet." Sun defines Java as: "a simple, object-oriented, distributed, interpreted, robust, secure, architecture-neutral, portable, high-performance, multithreaded, dynamic, buzzword-compliant, general-purpose programming language. Java supports programming for the Internet in the form of platform-independent Java applets." Java applets are small, specialized applications that comply with Sun's Java Application Programming Interface (API) allowing developers to add "interactive content" to Web documents (e.g. simple animations, page adornments, basic games, etc.). Applets execute within a Java-compatible browser (e.g. Netscape Navigator) by copying code from the server to client. From a language standpoint, Java's core feature set is based on C++. Sun's Java literature states that Java is basically "C++, with extensions from Objective C for more dynamic method resolution".

Another technology that provides similar function to JAVA is provided by Microsoft and ActiveX Technologies, to give developers and Web designers wherewithal to build dynamic content for the Internet and personal computers. ActiveX includes tools for developing animation, 3-D virtual reality, video and other multimedia content. The tools use 5 Internet standards, work on multiple platforms, and are being supported by over 100 companies. The group's building blocks are called ActiveX Controls, small, fast components that enable developers to embed parts of software in hypertext markup language (HTML) pages. ActiveX Controls work with a variety of programming languages 10 including Microsoft Visual C++, Borland Delphi, Microsoft Visual Basic programming system and, in the future, Microsoft's development tool for Java, code named "Jakarta." ActiveX Technologies also includes ActiveX Server Framework, allowing developers to create server applications. One of ordinary skill in the art will readily recognize that 15 ActiveX could be substituted for JAVA without undue experimentation to practice the invention.

Figure 1B is a block diagram of a preferred embodiment of the system

20 utilizing native code. The major components of the system are
described below with reference to Figure 1B. The mechant web site
180 contains the shopping Common Gateway Interface (CGI) 190
which is provided by the merchant or other web server communication
system. The CGI is an interface which allows applications to access,

25 process and respond to incoming messages. Industry slang is to refer
to CGI scripts as a way of saying that a programmer is writing web
server applications in scripting languages. A CGI script is a type of
software application program. Merchants typically are setup with
programs for authorization that are made up of CGI scripts. A

15

20

25 -

certificate of authority will also have a web server and the handling of certificate requests will utilize CGI scripts. Consumers interact with this system to shop at the merchant site. The merchant system also accepts payment transactions originating from the consumer using the PayWindow helper application. The payment instruction 192 is a file representing the Multipurpose Internet Mail Extension (MIME) message that is created by the merchant system when the consumer elects to pay. This MIME message contains the order information and the payment instructions which are specific to the merchant. The order information contains the Goods and Services Order (GSO), shipping address, merchant Uniform Resource Locator (URL), merchant certificate, merchant name and address, and transaction ID associated with the order. The payment instructions contains the payment instruments that the merchant accepts and the payment protocol preferences.

On receiving the MIME message from the merchant system, the browser launches the PayWindow application which is defined as a helper application in the browser. The browser sends the MIME message to the PayWindow and the PayWindow interacts with the consumer to complete the payment. One of ordinary skill in the art will readily comprehend that Java, Netscape/Oracle plugins and ActiveX could readily be substituted for the MIME message underlying the architecture of this embodiment. A Java embodiment is presented below as an alternative embodiment to provide another example in accordance with another preferred embodiment.

The Address Instructions file **194** contains information representative of the MIME message that is created by the merchant system when the consumer clicks on a button on the merchant's web page for an

automatic fill-in of his or her address from the wallet database. The MIME message contains the merchant's URL and the type of address that the merchant is seeking from the wallet database. The wallets contain the consumer's shipping and billing address. Once the MIME message is received from the merchant system, the browser launches the Address Requisition application 176 of the Verifone Web Site 184 which is defined as a helper application in the browser. The Address Requisition application 146, 176 interacts with the consumer to complete the address requisition request.

10

15

5

The Certificate Issuance at the Bank Web Site 162 resides at the bank web site 182. It is utilized for issuing SET complaint / X.500 certificates to consumers. The implementation of this system may vary from one bank to another. However, at a high level, this system gathers consumer's personal information. After processing the information, the system issues a certificate along with a payment instrument to the consumer.

the Single Account Wallet 160 at the bank web site 182 represents
the MIME message that is created by the Certificate Issuance system.
This MIME message contains a VeriFone wallet. The VeriFone wallet contains a single payment instrument and the certificate associated with it. For security reasons, the private key is not included in the wallet. The has to specify a private key before using the instrument for payment. When the consumer is issued the certificate, this MIME message is sent to the browser. The browser launches the Certificate Installation application 174, 144 which is defined as a helper application in the browser. The Certificate Installation application

10

15

20

174, 144 reads the MIME message and install the wallet into the wallet database 158.

Various helper applications 198, 172, 174, 176 are provided to make the consumer's shopping experience easy and efficient including the following helper applications. The Paywindow helper application 188 is utilized by the consumer to authorize the payment to the merchant, to administer their wallets, to review their previously completed payment transactions and to perform housekeeping activities on the wallets. This application is defined as a 'helper' application on the consumer's desktop. The browser launches this application when the merchant system sends a MIME message requesting payment.

The PayWindow Setup Helper application 172 is used by the consumer to install helper applications and other modules from the web site onto the consumer desktop. When a consumer attempts to install an application for a first time, the consumer does not have a helper application on the desktop. Thus, the first time installation of an application requires a consumer to perform two steps. First the user must download the system package to their desktop and then the user must run setup to decompress and install the system. Thereafter, whenever the consumer gets a new release of system software, the browser launches this helper application which in turn installs the appropriate other system modules.

25

The Certificate Installation Helper Application 174 is utilized to install a wallet that is issued by a bank. When the bank's certificate issuance web system sends the MIME message containing the VeriFone wallet,

5.

the browser launches this application. This application queries a consumer to determine if the payment instrument contained in the wallet is to be copied to an existing wallet or to be kept in the new wallet. This application then installs the payment instrument and the certificate into the wallet database **158**.

The Address Requisition Helper Application 176 is utilized by a consumer to send his or her address from a specified wallet directly to the merchant system. When the merchant system sends the MIME message requesting the consumer's shipping and/or billing address, the browser launches this application. This application 176 queries a consumer to open a wallet if a wallet is not already open and show the requested address to the consumer. Once the consumer okays the address, the application 'posts' the requested information via an HTML form to the merchant. The HTML format of this form is

- HTML form to the merchant. The HTML format of this form is standardized. Every merchant system electing to use this (Address Requisition) feature accepts this form. In addition there are other software modules that is required to run the helper applications. First time around, these modules and the helper applications is
- 20 downloaded and installed by the consumer on his or her desktop. Thereafter the Setup Helper application 172 automatically installs future releases of helper applications or other software modules. Whereas an address requisition is presented as an embodiment, one of ordinary skill in the art will readily comprehend that clothing sizes,
- 25 music preferences, mother's name or other information to assist a merchant can also be uploaded via similar means without departing from this embodiment.

Figure 2 provides an alternative preferred embodiment in accordance with a Java based implementation of the invention. Java is a network

application enabler for applications that utilize the Internet and HTML. Java is an object-oriented languagge that was developed by Sun Microsystems to speed development of their network applications.

5

10

Only the differences between the native embodiment discussed earlier and the Java version is addressed to clarify the discussion. A Payment Instruction Applet 200 at the Merchant Web Site 180 is responsible for delivering the order information to the PayWindow Applet 210, 230 on the consumer's desktop 186. This order information has the same information that is contained in the Payment Instruction MIME message which was described in the PayWindow System View Native Code section.

The applet is a part of the payment HTML 192 page which is displayed by the merchant to the consumer. The applet requires that the following parameters be set with appropriate data when the payment

15

20

page is generated by the merchant system GSO, Shipping Address, Merchant, Merchant Certificate, Merchant URL and Button Text. The applet 200 displays a button called "Pay", "Use PayWindow" or the value of the Button Text parameter. Once clicked, the applet delivers the above information to the PayWindow applet on the consumer's desktop. The consumer interacts with the PayWindow 210 Applet to complete the payment transaction.

25

The Address Requisition Applet 204 at the Merchant Web Site 180 is utilized by the merchant system 180 to obtain a consumer's shipping and/or billing address. This applet is displayed on the HTML page

which accepts the consumer's shipping or billing address. The applet displays a button called "V-wallet" or the value of the Button Text parameter. Once clicked, the applet 204 launches the AddressWindow applet 214 utilizing the consumer's address. The AddressWindow applet 214 interacts with the consumer and send the address information to the merchant system 180. The address information is then processed consistent with the processing in the native system.

The Certificate Issuance CGI scripts 162 and the Single Account

Wallet 160 at the Bank Web Site 182 is processed as described in the native system. The Certificate Installation Applet 220 of the Bank Web Site 182 is utilized by the Certificate Issuance CGI scripts 162 system to deliver a consumer's certificate to the consumer's desktop.

A variety of applets are provided at a web site to make the consumer's shopping experience easy and efficient. These helper applications include a Setup Applet 212, PayWindow Applet 210 and an AddressWindow Applet 214 similar to the PayWindow Helper Application Native section discussed above.

20

25

Figure 3 is an architecture block diagram in accordance with a preferred embodiment of the subject invention. Processing commences at function block 300 where the Graphical User Interface (GUI) part of the application is initialized. The GUI application 300 provides the consumer with support for ordering and making payments during the shopping process. There are also GUI components provided for wallet creation; importing, certificate and payment method creation and maintenance; and for transaction

register review and reporting. The screen designs, and their associated logic, for the helper applications and applets are individually discussed in detail below.

- The Certificate Manager **304** manages the automatic downloading of a consumer's certificate from a bank, validation of a consumer's and a merchant's certificates and automatic requisition of certificate renewal.
- The Payment Manager **306** coordinates and completes the payment request that is received from the merchant system. The payment request is received via a MIME message in the native code implementation or via an applet in the Java implementation. The payment request received contains the final GSO, Ship-To name, merchant certificate, merchant URL, coupons and the payment amount. The manager **306** then communicates with the payment related GUI component to interact with the consumer to authorize and complete the payment transaction. The manager is also responsible for determining the payment protocol based on the consumer's payment instrument and the merchant's preferred payment protocol.

The manager **306** includes a well defined Application Programming Interface (API) which enables OEMs to interface with the payment manager **306** to make payments to specific HTTP sites. The detailed logic associated with the payment manager **306** is presented in Figure **4**.

10

422.

provided.

. .

The payment manager 306 enforces standard operations in the payment process. For example the receipt and the transaction record can automatically be transferred to the Wallet file once the payment is completed. The payment manager architecture in accordance with a preferred embodiment is presented in Figure 4. A user interfaces with the payment manager 430 via a user interface 400 that responds to and sends a variety of transactions 410, 408, 406, 404 and 402. The transactions include obtaining the next record, payment record, receipt, acceptance of the payment instrument and GSO components. In turn, the payment manager 430 sends transactions 414 and receipts 420 to the wallet manager 422 and receives payment

instruments, certificates and private keys from the wallet manager

The payment manager 430 also sends and receives transactions to the protocol manager 470 including a merchant's payment message 460, a consumer certificate and PK handle 450, a merchant URL 442, a payment 440, a signed receipt 434 and a GSO, Selected Payment Protocol and Selected Payment Instrument 432. The payment manager 430 also accepts input from the payment applet or MIME message from the merchant as shown at function block 480. One aspect of the payment processing is a Consumer Payments Class Library (CPCL) 470 which encapsulates the payment protocols into a single API. By encapsulating the payment protocols, applications are insulated from protocol variations. A SET Protocol provides an implementation of the client-side component of the Secure Electronic

Transaction (SET) Protocol. A complete implementation of the client-

side component of the CyberCash micro-payment protocol is also

The Wallet Manager 422 provides a standard interface to the wallet. It defines the wallet database structures and the payment instrument data structures, controls the access to the wallet and provides concurrency checking if more than one application attempts to open the same wallet. The interface to the wallet manager 422 is published to allow OEMs to interface with the wallet manager and access the wallet database.

The wallet manager consists of the following sub-components:

Wallet Access. This component provides an interface to read and write wallet information.

Transaction Manager. This component provides an interface to read and write transaction corresponding to a wallet into the wallet database.

Payment Instrument Manager. This component manager provides a common interface to the specific payment instrument access components.

Credit Card Access, Debit Card Access, Check Access. These components deal with a specific payment instrument.

A Data Manager provides storage and retrieval of generic data items and database records. It is assumed that data fields, index fields or entire data records can be marked as encrypted and the encryption process is largely automated. The data manager has no specific knowledge of database records appropriate to different payment methods. This layer is separated out so as to reduce changes required when new payment methods are introduced. However RSA key pairs and certificates might be considered as "simple" data types. This

component also provides an abstraction which supports wallet files on computer disk or contained in smart cards.

The Open Data Base Connectivity (ODBC)/Java Data Base Connectivity (JDBC) component provides Data Base Connectivity where formal database components are required. An embodiment of the Smart Card Wallet allows wallet data to be stored and/or secured by a cryptographic token.

A preferred embodiment includes a single file or directory of files comprising a "wallet" which contains personal information and 10 information about multiple payment methods with the preferred implementation. These payment methods (Visa cards, debit cards, smart cards, micro-payments etc.) also contain information such as account numbers, certificates, key pairs, expiration dates etc. The wallet is envisaged to also contain all the receipts and transaction 15 records pertaining to every payment made using the wallet. A Cryptographic API component provides a standard interface for RSA and related cryptographic software or hardware. This support includes encryption, signature, and key generation. Choice of key exchange algorithm, symmetric encryption algorithm, and signature 20 algorithm should all be configurable. A base class stipulates generic behavior, derived classes handle various semantic options (e.g. software based cryptography versus hardware based cryptography.)

The Cryptographic Software portion provides RSA and DES support. This may be provided utilizing the SUN, RSA or Microsoft system components depending on the implementation selected for a particular customer. Cryptographic Hardware creates a lower level

API which can underpin the Cryptography API and be utilized to replace Cryptography Software with an off the shelf cryptography engine.

The message sequence charts describe the flow of messages/data between the consumer, the browser and/or the various major components of the Semeru system. The major components of the system are the Merchant system which includes the vPOS, the PayWindow, and the Payment Gateway. The merchant system allows a consumer to shop, accept the payment transactions sent by the PayWindow application, and send payment transactions to the acquiring bank. The Consumer Payments Class Library (CPCL) module is a layer within the application which sends the payment transactions, securely, from the consumer to the merchant.

Figure 5 is a Consumer Payment Message Sequence Diagram in 15 accordance with a preferred embodiment of the invention. The diagram presents the flow of messages between the consumer, the browser, the merchant system, the PayWindow application, and CPCL. This message flow describes the payment process from the time an forder is completed and the consumer elects to pay, to the time the payment is approved and the receipt is returned to the consumer. The difference between the Native implementation and Java implementation of the PayWindow application is in the delivery of the order information to the PayWindow. Once the order information is received by the PayWindow, the flow of messages/data is the same for 25 both implementations. In the case of the Native implementation, the order information is delivered via a MIME message. This MIME message is sent to the PayWindow by the browser via a document file. In the Java implementation, the order information is delivered to the

10

20

PayWindow by an applet. The merchant system sends an applet with the order information to the browser which in turn delivers the order to the PayWindow. Once the order is received, the PayWindow interacts with the consumer and the Protocol modules for the completion of the payment process.

Enters Order and Clicks Calculate Order 520

This message represent the consumer order entry and the clicking of the 'Calculate Order' button. The consumer's shopping experience is all condensed into this one message flow for the purpose of highlighting the payment process. The actual implementation of the shopping process varies, however, the purpose does not, which is the creation of the order.

Order 530

This message represents the order information which is sent by the browser to the merchant via an HTML form.

Payment Applet with GSO, PPPs, AIs, merchant certificate and URL 540

On receipt of the order, the merchant system calculates the payment amount. This message represents the HTML page which is sent by the merchant system detailing the payment amount along with the Java payment applet which contains the GSO, PPPs, AIs, merchant certificate and URL.

Run Payment Applet 545

The Java enabled browser runs the Payment applet. The applet displays a button called "Pay" for the consumer to click. This is embedded in the HTML page delivered by the merchant.

Clicks Pay 550

This message represents the clicking of the Pay button on the browser by the consumer after confirming the payment amount.

GSO, PPPs, Als, merchant certificate and URL 560

This message represents the GSO, PPPs, AIs, merchant certificate and the merchant URL carried by the Java applet. The Java applet now delivers these to the PayWindow application.

Merchant certificate 562

10 This message represents the merchant's certificate which is sent to the CPCL module for checking the validity of the merchant.

Merchant's validity 564

15

20

25

The CPCL modules examines the merchant's certificate and send this message to the PayWindow indicating whether or not the merchant is a valid merchant.

Wallet, Payment Instruments 566

This message represents the wallets and payment instruments that is displayed to the consumer. Not all payment instruments from a wallet is shown to the consumer. Only the ones accepted by the merchant is shown.

Payment Instrument 568

This message represents the payment instrument selected by the consumer. This message is created in the current design when the user double clicks on the payment image in the "Select Payment Method" Window.

- 12:

<u>GSO 570</u>

This indicates that the GSO is displayed to the consumer in the "Make Payment Authorization" screen.

5 Authorization of Payment 572

This message represents the authorization of the payment by the consumer. The consumer authorizes the payment by clicking the 'Accept' button on the "Payment Authorization" screen.

Decide Payment Protocol 574

Once the consumer authorizes the payment, the payment protocol is decided by PayWindow based on the merchant's Payment Protocol Preferences and the consumer selected payment instrument.

Payment Authorization 575

These messages represent the merchant's URL, the GSO, payment protocol (PP) to use, account number, certificate and the private key handle (PK) associated with the payment instrument which is sent to the protocol module.

GSO with Payment Authorization 576

This message represents the payment instructions which is sent by
the protocol module to the Merchant system. The GSO, PI, consumer certificate and PK is packaged based on the payment protocol.

Signed Receipt 578

This message represents the digitally signed transaction receipt received by the protocol module from the merchant.

25 Save Receipt with hash value 580

15

20

The digitally signed transaction receipt is saved by the PayWindow for future reference.

Payment Successful 582

This indicates that the transaction receipt and the 'payment successful' have been displayed to the consumer.

PayWindow Requirements in Accordance

With a Preferred Embodiment

There are various requirements that a consumer demands of a paywindow application, such as, support for a particular target hardware platform, secure communication of payment information on the public network, easy configuration and accessibility, simplified order entry and transaction completion, store payment instrument information safely and securely, provide a wide variety of payment instruments, retain URLs of consumer's favorite shops, launch browser from the payment window to visit shops, keep records and export records for transaction data, provide shopping assistance, support multiple users with a single application, display merchant certificate and payment forms that are acceptable to a particular merchant, manage digital credentials, provide multiple accounts for a single payment type, provide support for merchant value add or loyalty programs and the support must be portable to another client machine.

A merchant has a different set of requirements for a payment application which include: consistent information format; loyalty and branding opportunities; multiple payment types for a consumer to

select from; tight integration with a merchant store; links from the system to the merchant's store, better risk management / rates utilizing the system. A link could be a hypertext connection between two displays, a point-to-point connection between areas in a single display, a Uniform Resource Locator (URL), an index, a reference to an address or other means which facilitates transfer of control from one area of execution to another area of execution (across machines, network locations or even satellite linkages and microwave transmissions).

10

15

20

5

A preferred embodiment in accordance with the invention provides a software application used by the consumer to make electronic payments. It runs on the consumer's workstation and is either a free standing application to a WWW browser or is embedded into a custom application, and is invoked whenever the consumer has completed the ordering process for a particular item and is ready to pay.

The Pay Window application in accordance with a preferred embodiment supports multiple local users. Each user's data is independently stored and secured. On program startup, a user must sign in with an ID and password. All information (on local disk or floppy) is encrypted with a password entered by the user each time the program is invoked.

Payment Instruments

Due to the varying size of transactions and differing payment instrument usage related to social, economic and cultural factors, support is required for multiple payment instruments. Much like today, a consumer making a purchase from a merchant must have a

choice of payment methods depending upon their personal preference. The supported payment instruments include: credit cards, electronic checks, electronic money, micropayment (electronic coin), debit card and smart cards.

5 Secure Payment Protocol

One of the core features in accordance with a preferred embodiment is the ability to accept and make payments in a secure and reliable manner. Secure payment on the Internet becomes as safe and reliable as Point of Sale (POS) terminals today with payment solutions in accordance with another aspect of the present invention. While selection of a security protocol can be considered a technical design consideration, there is high marketing value in supplying quick time to market in the solution.

Payment Process

15 The payment process is separated from the administrative function.

Once a consumer has decided to make a purchase from the merchant, the application requests a user name and wallet password, display merchant and order information, request that a user select a payment instrument from the wallet, and display and capture order

20 acknowledgement and digital reciept. Basically for a payment instrument you can utilize any instrument that is evidence of membership, identity, certification or authority. For example, a card for video membership could be utilized to check out videos electronically via the internet.

25 Transactions Supported

The application in accordance with a preferred embodiment is able to originate sales and refund transactions types. It also provides

-:-

.....

automatic fill-in of addresses based on a user preferences file, and if no information is specified when a transaction is initiated, the information from the last payment transaction is utilized as default information.

5 Shopping Support (shopping companion).

The application in accordance with a preferred embodiment also shares payment and shipping information with the merchant and URLs from merchants which a consumer has frequented before linkage for visitation.

10 Administrative Functions

To simplify use of the application, actual payment and administrative functions are separated. Users are not presented with administration information while trying to complete an on-line payment process. Therefore the following administrative functions are supported:

15

20

25

Data Management

Data is automatically backed up to disk on a periodic basis based on user requirements. A user can view the contents of a backup in various ways. For example, a user can restore selected data from a backup, everything stored, selected user information only, or everything except payment history information. Data export is also supported for selected digital receipts or order acknowledgements for email or to print for dispute resolution with a bank or other merchant. Data export is also provided to the following financial programs: Quicken, Microsoft Money and Managing your money.

10

20

Receipt and Transaction History Management

Receipt and transaction history management is also provided for viewing order history by time, payment instrument type, merchant and by completed, uncompleted or pending transaction. A purge order history transaction is also provided to purge the order history file by time or by payment instrument type. Another report is provided which shows digital receipts for orders placed including credit card number, expiration date, name, billing address and public key certificate. Order acknowledgements are also transmitted for every order that has been placed, and an export status tag is generated if an item has been exported to an external financial management program.

15 User Administration

Various user administration transactions are also provided. They include a feature that creates an empty wallet for an user and sets a default password for the user when a new user is created. A delete user, change user password, and sign on as a user is also provided, but requires a user's password to activate. A view list of users is also provided and does not require a password to see the users defined to the system.

Wallet administration

Wallets are user specific and require the particular user to whom the wallet belongs to be effective. A preferred embodiment provides transactions for adding a new payment instrument, deleting a

6.

payment instrument, viewing a list of payment instruments and modifying a payment instrument.

Loyalty Programs and Coupons

Coupons are also accepted as well as other loyalty programs that a 5 merchant might utilize, and provisions are provided for viewing loyalty program status and viewing existing coupons.

Interoperability

A preferred embodiment of the invention interoperates with many browsers and merchant systems. The requirements for 10 interoperability across browsers and merchants applies to a base level functionality.

Smart Card Integration

Smartcard integration provides the consumer another payment method (stored value on a smartcard), portability of wallet information 15 (key, payment instrument info, etc.).

International Localization Requirements

Support for localization to a particular country is built into the product for the major countries of the world.

- 20 Figure 6 is a flowchart setting forth the detailed logic of a paywindow user interface in accordance with a preferred embodiment of the invention. Processing commences at function block 600 where an internet browser implemented as a Java applet detects the selection of a payment button and a test is performed at decision block 610 to 25
- determine if a wallet is open. If so, then the method of payment is

10

15

20

25

determined at function block **630** and if a user cancels the processing, then control is returned to the Internet Browser at **632**. If a user selects payment authorization at function block **634**, then if the user can cancel authorization as shown at function block **650**, accept payment authorization as shown at function block **640**, or change the pay method as shown at **635** which results in a transfer of control to function block **630**. If the wallet was not open when the test was performed at decision block **610**, then the wallet is opened as shown at function block **620**, and control is passed to the Administration Screen at **622** for processing consistent with the logic presented in Figure **7**, or if the user cancels processing, then control is returned to the Internet Browser as shown at **624**.

Figure 7 is a flowchart of the detailed logic associated with the administration mode of the paywindow in accordance with a preferred embodiment. Processing commences at function block 700 when the application is desktop launched. A user is first exposed to the PayWindow 710 which has a number of selections available. If a user selects a wallet 720 then at function block 721, the wallet is opened and control is passed to function block 722 for a particular form of payment to be selected. Once the particular form of payment is selected at 724 or payment selection is cancelled at 726, then control is returned to the main paywindow at function block 710. However, if a user has selected to open a new wallet at function block 721, then control is passed to the administration function block 740 for further processing.

If a user selects administration mode from the main paywindow 710, then another test is performed at decision block 732 to determine if

....

the wallet is open. If the wallet is open, then control is passed to the administration function block 740 for further processing. If a user selects register processing 712 from the main paywindow 710, then control is passed to the register function block detailed in Figure 8 at 800. If a user selects reports processing, then control is passed to the reports function block 860 of Figure 8 for further processing. If a user selects backup / restore 716 then a backup or restore is performed utilizing the operating system tools in accordance with a preferred embodiment as described above.

10

15

20

25

If the wallet is determined to not be open at decision block 732, then control is passed to function block 734 to open the wallet. After the wallet is open, then control is either passed to function block 736 to select payment, or if the user has cancelled the operation, control is passed to the main window 710 or if this is a new wallet, then control is passed to the administration function block 740.

When control passes to the administration function block, then if the wallet tab is selected, then control passes to the administration wallet page at function block 750 and if a user is interested in browsing, then a file open dialog is initiated at function block 760, or if a request to remove the wallet from processing is received, then a remove confirmation dialog is initiated at function block 770. If a user is interested in changing the administration preferences, then control is passed to function block 780. If a payment administration processing is selected, then control is passed to the administration payment page as shown in function block 790 where a certificate can be installed as shown in function block 796, a confirmation dialog can be added at function block 794 or a remove confirmation dialog is

1.5

5

10

15

20

25

processed at function block **792**. When administration processing is completed, control is passed back to the main paywindow at function block **710**.

Figure 8 is a flowchart of administration mode processing associated with register and report processing in accordance with a preferred embodiment. Processing commences at 800 where control is passed if an administrative register task is to be processed. The register function is parsed at function block 802 and if a detail function is to be processed, control is passed to function block 850 to determine if a hot link to a merchant site is desired. If so, then control is passed via 852 to launch a browser and go to the merchant site at 856. If not, then control is passed via 858 back to the register function 802. If a find function is to be processed, then control is passed to function block 840 where a find operation is performed for a particular item 844 or a find next operation is performed 842. When find processing is completed or cancelled 846, control is passed back to the main register screen. If a customize register processing is desired, then control is passed to function block 830 to customize the register. If a clear operation is required, then control is passed to 832 to clear the register. When the customize operation is complete, then control is passed back to the main register processing. If a delete register operation is requested, then control is passed to function block 820 and a delete confirmation dialog is conducted at function block 822. Finally, if an output register operation is requested, then the register window is removed at 804, control is passed to function block 810 and a file open dialog is initiated at function block 812. When the dialog is completed, then control is returned to function block 802.

10

15

20

25

30`

If a report button is pressed from the administration paywindow screen, then control is passed **860** to the reports function block **870** to customize reports at function block **880**, clear reports **882** or output reports **872** which is accomplished via a file open dialog at function block **874**.

PayWindow

Figure 9 is an illustration of a paywindow display in accordance with a preferred embodiment. The paywindow display 980 presents a list of available payment instrument holders in graphic form such as a purse bit image 900, or wallet bit image 910, 920 to a user once an appropriate password is entered via an entry point 930. A scroll bar 922 is provided to allow the list of available payment methods to be scrolled, or selecting the up arrow 924 or the down arrow 926 can be used to review the available payment methods. In addition, there are areas provided at the bottom of the screen for opening 970, creating a new 960 wallet and cancelling 950 payment. The Cancel button 950 invokes the display of the payment cancellation screen. Finally, a message area is provided at the bottom of the screen for communicating system messages 940. If a user presses the right or left mouse button the focus of the window is shifted accordingly. The tab key on the keyboard attached to the cpu is utilized to move and cycle the highlight between various controls on the display. If the enter key is pressed, the highlighted control is activated. For example, if the enter key is pressed after information is entered into the password field 930, then the password is checked with the password file to determine if a valid password has been entered. The wallet's listbox is a single selection listbox which displays all the wallets installed on the system. A user may utilize the mouse or keyboard to select a wallet to open. The New button 960 creates a new wallet file and displays the 'Administration' dialog for wallet information entry.

Payment Instrument

Figure 10 illustrates a list of payment instruments represented as bit mapped images for a user to select from in accordance with a preferred embodiment. The payment instruments include a credit card, debit card, smart card, ecash, micropayments and electronic 5 checks. The open button 970 invokes the payment instrument screen. By clicking on the Select button 1000, control is transferred to an authorization screen where the details of the order are displayed. The payment instruments represented in Figure 10 include a Bank Americard Visa 1040 with a graphical image that is virtually identical 10 to the user's actual card, so such information as payment instrument holder's name, instrument name, membership period and expiration date. Such images can be obtained by scanning the user's cards or ... utilizing the manufacturer's template and adding text representative of the user's name. A Chevron checking account 1020 is also provided 15 with an enlarged Chevron logo to represent the user's checking account which is another type of payment instrument that is supported in a preferred embodiment. A Wells Fargo Visa 1030 payment instrument is also provided in accordance with a preferred embodiment. Whereas realistic representations of actual visa cards 20 are represented in Figure 10, one of ordinary skill in the art will readily appreciate that other, user-defined graphic or text information can be utilized to represent the payment instruments. Pressing the Cancel button 1010 goes back to the Payment Cancellation screen. 25 Choosing Bob's wallet 1050 goes back to the open wallet display screen to enter Bob's wallet password 930. Double clicking on any payment instrument takes you to an authorization screen for that particular payment instrument. Clicking on a payment instrument icon puts a border around it, indicating it has been selected. An example of the border is shown for Jane's purse 1060 and the graphic 30

associated with Jane's purse has an indicia of the open state which is a graphic in an open position as shown at 1060. Similarly, if a wallet is selected, such as Bob's Wallet 1050, the graphic associated with the wallet could be represented with an indicia of openess, such as a changed color, or a graphic that portrays an open wallet.

Source code in accordance with a preferred embodiment is provided below as another form of detailed logic disclosure. The WalletBrowserPanel class displays the wallets and the payment instruments contained in it. It utilizes the PasswordEntryPanel, ImageSelectorPanel and the ImageItem classes. The PasswordEntryPanel class accepts the password for a given wallet from the user. The ImageSelectorPanel class displays the wallet icons and the payment instrument icons and allows the user to select/deselect an wallet or instrument. Displaying of an icon on the screen is managed by the ImageItem class.

```
import java.awt.*;
20
     import java.net.*;
     import java.util.*;
     public class WalletBrowserPanel extends Panel {
           private PayWindow payWindow;
           private WalletManager walletManager;
25
           private ImageSelectorPanel walletPanel, instrumentPanel;
           private Button btnOK, btnCancel;
           private Panel buttonPanel, walletDetail;
           private PasswordEntryPanel passwordEntryPanel;
30
           private Insets insets = new Insets(15, 15, 15, 15);
           private ImageItemRef openWalletImageItem = null;
           public WalletBrowserPanel(PayWindow pw) {
35
                payWindow = pw;
                 walletManager = WalletManager.getWalletManager();
                 btnOK = new Button("Open");
                 btnCancel = new Button("Cancel");
                 buttonPanel = new Panel();
```

```
buttonPanel.setLayout(new FlowLayout(FlowLayout.CENTER,
     15, 10));
                 buttonPanel.add(btnOK);
                 buttonPanel.add(btnCancel);
5
                 instrumentPanel = new ImageSelectorPanel(false, null);
                 walletPanel = new ImageSelectorPanel(false, null);
                 Enumeration walletNames = walletManager.getWalletNames();
                 String name;
                 Wallet wallet;
10
                 while(walletNames.hasMoreElements()) {
                       name = (String)walletNames.nextElement();
                       wallet = walletManager.getWallet(name);
                       try {
                              walletPanel.addImage(name, new
15
                                    URL(walletManager.getImageDir() +
                                    wallet.getCloseBitmap()), wallet);
                       } catch (Exception e) {
                             System.out.println(e);
20
                 passwordEntryPanel = new PasswordEntryPanel(this);
                 passwordEntryPanel.setPanelSize(new Dimension(375, 290));
                 walletDetail = new Panel();
                 walletDetail.setLayout(new CardLayout());
25
                 walletDetail.add("PasswordEntryPanel",
           passwordEntryPanel);
                 walletDetail.add("InstrumentSelection", instrumentPanel);
                 setLayout(new BorderLayout());
                 add("South", buttonPanel);
30
                 add("West", walletPanel);
                 add("Center", walletDetail);
                 walletNames = walletManager.getWalletNames();
                 name = (String)walletNames.nextElement();
                 passwordEntryPanel.setWallet(name);
35
                 displayOpenWallet();
           public void openNewWallet() {
                 ImageItemRef imageItemRef = walletPanel.
     11
                       getSelectedItem();
     //
40
     11
                 passwordEntryPanel.setWallet(imageItemRef.getName());
     //
                 btnOK.setLabel("Open");
     //
                 ((CardLayout) walletDetail.getLayout()).
                       show(walletDetail, "PasswordEntryPanel");
     //
     //
                 payWindow.setTitle("PayWindow - Open Wallet");
45
                 displayOpenWallet();
           public void getPaymentInstrument() {
                 ImageItemRef imageItemRef = walletPanel.
                       getSelectedItem();
50
                 Wallet openWallet = payWindow.getOpenWallet();
                 Wallet selectedWallet =
     (Wallet) imageItemRef.getUserObject();
                 if ((selectedWallet != null) && (openWallet != null) &&
                       openWallet.equals(selectedWallet)) {
55
     11
                       btnOK.setLabel("Select");
                       ((CardLayout)walletDetail.getLayout()).
     //
```

```
//
                               show(walletDetail, "InstrumentSelection");
       11
       //
                          payWindow.setTitle("PayWindow - Choose Payment
       Method");
   5
                          displayChoosePaymentMethod();
                   else {
                          displayOpenWallet();
 10
             public void disableOpenButton() {
                   btnOK.disable();
             public void enableOpenButton() {
 15
                   btnOK.enable();
             public void newWallet(Wallet wallet) {
                   System.out.println("Wallet Browser - newWallet");
                   try {
 20
                         walletPanel.addImage(wallet.getName(),
                               new URL(walletManager.getImageDir() +
      wallet.getCloseBitmap()),
                               wallet);
                   } catch (Exception e) {
 25
                         System.out.println(e);
            public Insets insets() {
 30
                   return insets;
            public boolean handleEvent(Event evt) {
                   if (evt.target == instrumentPanel) {
 35
                         if (evt.id ==
      ImageSelectorPanel.EVENT_IMAGEDOUBLECLICK) {
                               PaymentInstrument instrument;
                               ImageItemRef imageItemRef =
40
      (ImageItemRef)evt.arg;
                               instrument = (PaymentInstrument)
                                     imageItemRef.getUserObject();
                               payWindow.authorizePayment(instrument);
45
                  }
                  else
                  if (evt.target == walletPanel) {
                         if (evt.id ==
50
      ImageSelectorPanel.EVENT_IMAGESELECTION) {
                               ImageItemRef imageItemRef =
      (ImageItemRef)evt.arg;
                               Wallet wallet =
55
      (Wallet)imageItemRef.getUserObject();
                               if (wallet == payWindow.getOpenWallet() &&
```

```
payWindow.isPaymentRequest()) {
                                    btnOK.setLabel("Select");
     11
     11
                                     ((CardLayout) walletDetail.getLayout()).
     11
                                    show(walletDetail,
 5
     "InstrumentSelection");
                                    payWindow.setTitle("PayWindow - Choose
                                                                   Payment
     Method");
                                    displayChoosePaymentMethod();
10
                              else {
     11
           passwordEntryPanel.setWallet(imageItemRef.getName());
                                  btnOK.setLabel("Open");
     11
15
                                     ((CardLayout) walletDetail.getLayout()).
     //
     11
                                    show(walletDetail.
     "PasswordEntryPanel");
                                    payWindow.setTitle("PayWindow-Open
     //
     Wallet");
20
                                    displayOpenWallet();
                 else
25
                 if (evt.target == btnOK) {
                        if (evt.id == Event.ACTION EVENT) {
                              if (btnOK.getLabel() == "Open") {
                                    System.out.println("Open");
                                    ImageItemRef imageItem = walletPanel.
30
                                          getSelectedItem();
                                    Wallet selectedWallet =
           (Wallet)imageItem.getUserObject();
35
                                   // validate the password
                                    // close any open other open wallet
                                    if (openWalletImageItem != null) {
                                          Wallet prevOpenWallet = (Wallet)
40
           openWalletImageItem.getUserObject();
                                          prevOpenWallet.close();
                                         . try {
45
           walletPanel.changeImage(openWalletImageItem,
                                                       new
     URL(walletManager.getImageDir() +:
           prevOpenWallet.getCloseBitmap()));
50
                                           } catch (Exception e) {
                                                System.out.println(e);
                                     // open selected wallet
55
           walletManager.openWallet(selectedWallet.getName(), "");
```

```
payWindow.setOpenWallet(selectedWallet);
                                      openWalletImageItem = imageItem;
                                      // display open wallet icon
   5
             walletPanel.changeImage(imageItem,
                                                  new
       URL(walletManager.getImageDir() +
  10
             selectedWallet.getOpenBitmap()));
                                      } catch (Exception e) {
                                            System.out.println(e);
 15
                                      // get instruments
                                     instrumentPanel.removeAllElements();
                                     Enumeration instrumentNames =
                                           selectedWallet.getInstruments();
 20
                                     PaymentInstrument instrument;
                                     String name;
            while(instrumentNames.hasMoreElements()) {
 25
      (String) instrumentNames.nextElement();
                                           instrument =
      selectedWallet.getInstrument(name);
                                           try {
30
            instrumentPanel.addImage(name,
                                                       new
      URL(walletManager.getImageDir() +
            instrument.getBitmap()), instrument);
35
                                           } catch (Exception e) {
                                                 System.out.println(e);
                                    if (payWindow.isPaymentRequest()) {
40
                                         ·// display instruments
     11
                                          btnOK.setLabel("Select");
     11
            ((CardLayout)walletDetail.getLayout()).
                                                show(walletDetail,
45
     "InstrumentSelection");
                                          .displayChoosePaymentMethod();
                                    else {
                                          payWindow.showMenu();
50
                              else
                              if (btnOK.getLabel() == "Select") {
                                    PaymentInstrument instrument;
55
                                    ImageItemRef imageItemRef = '
     instrumentPanel.getSelectedItem();
```

```
instrument = (PaymentInstrument)
                                          imageItemRef.getUserObject();
                                    payWindow.authorizePayment(instrument);
 5
                 else
                 if (evt.target == btnCancel) {
10
                        if (payWindow.isPaymentRequest()) {
                              payWindow.cancelTransaction();
                       else {
                              payWindow.showMenu();
15
                 return super.handleEvent(evt);
         public void paint (Graphics g)
20
             g.drawLine(insets.left, size().height-insets.bottom,
                       size().width-insets.right, size().height-
     insets.bottom);
             g.drawLine(insets.left, size().height-insets.bottom+1,
25
                       size().width-insets.right, size().height-
     insets.bottom+1);
           private void displayOpenWallet() {
                 ImageItemRef imageItemRef = walletPanel.
30
                       getSelectedItem();
                 passwordEntryPanel.setWallet(imageItemRef.getName());
                 btnOK.setLabel("Open");
                 ((CardLayout)walletDetail.getLayout()).
                       show(walletDetail, "PasswordEntryPanel");
35
                 payWindow.setTitle("PayWindow - Open Wallet");
           private void displayChoosePaymentMethod() {
                 btnOK.setLabel("Select");
                 btnOK.enable();
40
                 ((CardLayout)walletDetail.getLayout()).
                       show(walletDetail, "InstrumentSelection");
                 payWindow.setTitle("PayWindow - Choose Payment Method");
45
     class PasswordEntryPanel extends Panel {
           private Image panelImage;
           private TextField password;
50
           private URL imageFileURL;
           private Dimension panelSize;
           private Label enterPasswordLabel;
           private Label walletNameLabel;
           private WalletBrowserPanel walletBrowserPanel;
55
           public PasswordEntryPanel(WalletBrowserPanel wbp) {
```

```
walletBrowserPanel = wbp;
                   ImageLoader imageLoader = new ImageLoader(this);
                   WalletManager wm = WalletManager.getWalletManager();
                   try {
  5
       11
                         imageFileURL = new
      URL("File://e:/htdocs/PayWindow/JavaDemoDev/images/open.wallet.backgr
      ound.gif");
      //
      URL("http://kimberly/PayWindow/JavaDemoDev/images/open.wallet.backgro
 10
      und.gif");
                   }catch(Exception e)
                         System.out.println(e);
                   panelImage = imageLoader.LoadImage(imageFileURL);
      //
 15
                  panelImage = imageLoader.LoadImage(wm.getPwdScrImage());
                  panelSize = new Dimension(panelImage.getWidth(this),
                         panelImage.getHeight(this));
                  enterPasswordLabel = new Label("Enter the Password for",
      Label.CENTER);
 20
                  walletNameLabel = new Label("", Label.CENTER);
                  password = new TextField();
                  password.setEchoCharacter('*');
                  setLayout(null);
                  add(password);
25
                  add(enterPasswordLabel);
                  add(walletNameLabel);
            }
            public void setWallet(String walletName) {
                  walletNameLabel.setText(walletName+":");
30
                  password.setText("");
                  walletBrowserPanel.disableOpenButton();
            public void setPanelSize(Dimension size) {
                  panelSize = size;
35
           public String getPassword() {
                  return password.getText();
40
           public Dimension minimumSize() {
                 return preferredSize();
           public Dimension preferredSize() {
45
                 return panelSize;
           public boolean handleEvent(Event evt) {
50
                 if (evt.target == password) {
                        if (evt.id == Event.KEY_RELEASE) {
                              if (password.getText().length() == 0) {
55
                                    walletBrowserPanel.disableOpenButton();
                              }
```

```
else {
                                     walletBrowserPanel.enableOpenButton();
  5
                  return super.handleEvent(evt);
          public void update(Graphics g) {
 10
                  paint(g);
          public void paint(Graphics g) {
                  g.drawImage(panelImage, 0, 0, size().width,
 15
      size().height, this);
                  g.drawImage(panelImage,
                         (size().width - panelImage.getWidth(this))/2,
                         (size().height - panelImage.getHeight(this))/2,
                        this);
 20
                  int labelWidth;
                  FontMetrics fontMetrics = g.getFontMetrics();
                  labelWidth = fontMetrics.stringWidth(
                        enterPasswordLabel.getText()) + 60;
                  enterPasswordLabel.reshape((size().width = labelWidth)/2,
 25
                         (size().height/2) - 30, labelWidth, 20);
                  labelWidth = fontMetrics.stringWidth(
                        walletNameLabel.getText()) + 60;
                  walletNameLabel.reshape((size().width - labelWidth)/2,
                         (size().height/2) - 10, labelWidth, 20);
- 30
                  password.reshape((size().width - 100)/2,
      (size().height/2) + 10,
                        100, 20);
                  g.drawRect(0, 0, size().width-1, size().height-1);
 35
```

Authorization

Figure 11 is an authorization display screen in accordance with a preferred embodiment. The authorization screen displays the transaction details and facilitates a user's examination of all the details of a particular transaction. It also allows a user to accept or cancel a transaction, or change the payment method for a particular transaction. The payment button on a web page launches this screen when a wallet is already open. The change payment method 1100 displays the Payment Instrument screen to allow a user to choose a

different payment instrument and transfers control to the paywindow display shown in Figure 9. The Order tab 1110 controls the display of pages of information about the transaction on order, merchant or address. Pressing the accept button 1140 signals the user's acceptance of the transaction, and it records the transaction data into the wallet's register and displays a PAID receipt as shown at 1200 at Figure 12. Pressing the Cancel button 1150 displays the payment cancellation screen as shown in Figure 13 at 1300.

PayWindow Main

Figure 14 illustrates a Main screen in accordance with a preferred 10 embodiment of the invention. This screen is displayed when a user runs an application in the local mode and indicates that the paywindow is operating in administration mode. The application launches from the desktop. The screen controls include a button for selecting wallet 1401 which displays the paywindow screen and 15 allows a user to open or create a new wallet. Another button, the report button 1410 opens an instance of the report window when it is selected. Selecting the register button 1420 opens the register window which allows a user to select from a variety of register transactions. Selection of the administration button 1430 opens the 20 administration screen which allows a user to perform various administrative tasks. If a user selects the backup/restore button 1450, then the backup/restore dialog is initiated. Finally, selection of the exit button 1460 closes the screen and terminates the application.

25 Administration

Figure 15 is an illustration of an Administration display screen in accordance with a preferred embodiment. This is the main screen for entering information pertinent to wallets, payment methods and user

preference settings into the system. The information is organized and presented in pages of grouped data. The Administration display is launched from the Administration button 1430 of Figure 14 in response to selection of the button by a user. The wallet tab 1510 controls management of pages of related information pertaining to the currently active wallet. Users can utilize the mouse or the keyboard to modify the pages of information. The done button 1590 saves the new information in the wallet when it is selected. The cancel button 1595 discards the changes and closes the display screen when it is selected.

10

15

20

25

Figure 16 illustrates a display of the administration wallet page in accordance with a preferred embodiment. The user must enter the name of the wallet into the entry field 1660, the wallet's owner must be entered at 1670, a password corresponding to the named wallet must be entered at 1675 the password entry is displayed with "*" characters entered in place of the letters and numbers of the password, and a confirm password must be entered at entry field 1678. This confirm password 1678 must match the password entered at 1675. The browse button 1680 opens the file open dialog to present a user with a list of wallets to choose from using a wallet icon file as input to the process. The remove wallet button 1685 removes the current wallet from the system and displays a confirmation message box prior to deletion.

The administration payment tab **1520** of Figure **15** initiates a screen as illustrated in Figure **17**. Figure **17** is a payment administration window in accordance with a preferred embodiment. A user may use payment page of the administration screen to view or edit a payment method's information.

The listbox control 1710 displays all the payment methods currently installed in this wallet. A user can scroll the listbox control to see all of the payment methods available to the owner 1760. The user must select a payment method prior to viewing its information. The selection is accomplished by positioning the cursor over a payment method that the user requires and clicking the mouse button or pressing the enter key to select that card as the method for payment. The card name edit field 1750 is used to display or edit the name that the system utilizes to refer to the currently selected method for payment. The card type data entry field 1760 corresponds to the various types of methods for payment. Many of the types are predefined for a user, such as: master card, visa, discover.

An associated card number entry field 1780 is also provided to display and/or edit the card number. An entry field 1782 is also provided for 15 display and/or edit of the card's expiration date. A certificate dialog box 1784 button is also provided for initiating the attachment or editing of a certificate. A checkbox control 1792 is also provided if a user desires to make the selected card the default method for payment for a particular wallet. This is an attractive feature since it eliminates selection of a particular method of payment each time a wallet is opened. The ergonomics are well thought out to parallel a user's wallet in which the favorite credit card is usually stored in a convenient location for ready retrieval when the holder of payment methods (ie., wallet, purse, brief case, smart card) is selected. Two 25 other buttons are provided for adding 1786 and removing 1790 a payment method to/from the holder of payment methods. The removal button 1790 displays a confirmation message prior to removal of the payment method. A button to signify completion of

15

20

25

processing 1742 and a button for cancelling processing 1746 are also provided.

Figure 18 is an illustration of the administration preferences page in accordance with a preferred embodiment. The address line one edit control 1810 is used to view or edit the first shipment address line for a particular user. The address line two edit control 1820 is used to view or edit the second shipment address line for a particular user. The city edit control 1830 is used to edit or view the shipment city for a particular user. The state edit control 1850 is used to edit or view the shipment state for a particular user. The zip code edit control 1860 is used to edit or view the shipment zip for a particular user. The country edit control 1840 is used to edit or view the shipment country for a particular user. A button to signify completion of processing 1870 and a button for cancelling processing 1880 are also provided.

Figure 19 illustrates the window controls in accordance with a preferred embodiment. The name of the active window is always displayed in the upper left hand corner 1930 for easy recognition by a user. The upper right hand corner has three buttons for minimizing the display 1900, maximizing the display 1910 and closing a display 1920. One of ordinary skill in the art will readily comprehend that other windowing display tools could be substituted for the tools described without undue experimentation. A touch display screen could also be substituted for environments where a mouse or keyboard might not be appopriate. One could even envision the displays being manipulated using a remote control device (infrared)

that interfaces with a television set for viewing, selecting and paying for purchases from the comfort of a living room or easy chair.

Figure 20 is a register display in accordance with a preferred embodiment of the invention. The register display lists all . 5 transactions in chronological order and allows a user to navigate through and examiner transactions associated with a wallet. A user also has the option of searching for particular transactions and examining detailed transaction information for any transaction. Finally a user can reconcile transactions against a bank statement as 10 well as a shipment list of merchandise. This display is initiated by selecting the register button from the administration screen. A user may only create a single instance of the register display, so additional clicks of the mouse button is only be utilized to set the focus to the single register display window. Clicking on an item displayed on the register display sets the selection highlight to the hit record associated with the area the cursor is currently displayed. Double clicking brings up additional detail on the currently selected record.

If-the user presses the tab key, the cursor moves to and highlights the 20 next control on the display. If the user presses the enter key, the highlighted button is invoked on the register display. When a transaction record is highlighted, pressing the up arrow key moves the highlight (selected item) to the preceding record. When a transaction record is highlighted, pressing the down arrow moves the highlight 25 (selected area) to the next record. Selecting the home key sets the highlight to the first record in the register report, and similarly, pressing the end key sets the highlight to the last record in the register report. Selecting the detail button 2010 on the register

10

15

20

25

display opens the register detail dialog. Selecting the find button 2020 opens the register find dialog. Selecting the customize button 2030 opens the register customize dialog. Once a user has customized a particular register, then the customize button 2030 displays a colored dot symbol to indicate an active filter is defined. If the delete button 2040 is selected, then the highlighted register is deleted after an appropriate confirmation message box is displayed and selected in the affirmative. Moreover, selection of the output button 2050, opens the output dialog with a user. Finally, selection of the close button 2060 closes the register screen. A scroll bar 2090 is also provided to allow a user to scroll through records extending over a single page. For each record, a date 2080, a time 2082, a payment instrument 2084, an item 2086, an amount 2088, a paid 2070 and a received 2072 entry is provided in a columnar representation. The paid 2070 and received 2072 allow a user to check/reconcile a record when paying the credit card payment.

Figure 21 is register detail display in accordance with a preferred embodiment. The register detail display allows a user to view or examine all of the specific details of a transaction. The display is launched when a user double clicks on a highlighted transaction record, or when a user presses the detail 2030 button as illustrated in Figure 20 of the register display. The order tab 2100 control selects an information page on the display. The Go To Merchant Site button 2110 button spawns the internet browser and sets it to the merchant web page. The ShipToAddress 2120 provides a link to the address information for the selected merchant. The memo 2150 edit control is used to view/edit a short memo text for each transaction. The paid 2170 checkbox allows a user to check/reconcile a record when he or

she pays the credit card payment. The received **2160** checkbox allows a user to check/reconcile the record when he/she receives the merchandise. The done **2140** closes the 'Register Detail' dialog and returns the focus to the register.

5

10

15

20

25

Register Find

Figure 22 is a register find display in accordance with a preferred embodiment. A user utilizes this display to search for a transaction record. The find button 2020 of the register display as described with reference to Figure 20 is used to initiate this display. The from date 2200 control is used to enter the starting date of a transaction. The to date 2210 control is used to enter the ending date of the transaction. The combobox 2220 is used to list all of the payment methods in the wallet. A pulldown 2225 control causes a list of payment methods to be displayed to the user. The item 2230 control is used to enter a full or substring of the target item of the search. The merchant combo 2240 display lists all of the merchant names in the wallet. The item 2250 control causes a list of all the merchant names to be displayed for selection of the particular merchant name required. The memo 2265 edit control is used to enter the full or substring of the memo to search for. The cancel 2295 button cancels and closes the register find dialog. The find 2295 button starts the search command. The find dialog remains open during the search and the search result in the register is highlighted. The search up 2260 button and down 2270 button direct the direction of the find operation. The find next 2280 button continues the search to locate the next register record.

15

20

Figure 23 is a register customize display in accordance with a preferred embodiment. The display facilitates a dialog which allows a user to create a record filter for transaction records. It provides functionality to save, recall and remove filters. Saved filters are shared between the register and report functions of the paywindow in accordance with a preferred embodiment. To initiate this display, a user selects the customize button 2030 of the register screen. The from date 2340 entry field allows a user to enter a starting date to show the records after this date. The to date 2350 entry field allows a user to enter an ending date to show the records up to and including this date. The item 2360 entry field allows a user to enter a full or substring of the item field as a filter parameter. The received 2365 button allows a user to select a 'received' flag as a filter parameter. The paid 2370 button allows a user to select a 'paid' flag as a filter parameter. The memo field 2380 allows a user to enter a full or substring of the memo field as a filter parameter. A user may select one or more payment methods as a filter parameter utilizing the paid by 2395 box. This multi-selection listbox displays all the payment methods in the wallet for a user to choose from. The merchant box 2397 allows a user to select one or more merchants as a filter parameter. This multiselection listbox displays all of the merchant names in the transaction register for a user to select from. The filters 2310 allow a user to name, store and retrieve filters by using the combobox and selecting, or entering a stored filter name. The memorize 2320 button assigns the name appearing in the filter 2310 box to the parameters specified on the display. The remove 2330 button allows a user to select a filter using the combobox, and delete it. The clear 2385 button allows a user to clear all of the filter parameters. The ok 2390 button activates a filter and closes the

PCT/US97/06940

5

10

15

customize dialog. The customize button of the register displays a dot indicating an active filter.

Figure 24 is a register output display for directing the output target for register information. For example, a user may select a printer or a file as the target for outputting the results of a register display. The output display is invoked by pressing the output button of a register display. The user clicks the printer button 2400 to initiate output of register display information to the printer. A user selects the export button 2410 to output the register information to a file in a file format selected form the type 2420 combobox. The user specifies a path/name for the output file in text entry field 2430. A user may open the file save dialog by selecting the browse 2435 button and setting the output file path and file name. The cancel 2450 buton cancels the operation and closes the dialog display. The ok 2460 button closes the dialog and starts the output of the register screen.

Report

Figure 25 is a report of a wallet in accordance with a preferred embodiment. The display is a pre-formatted report for use in customizing a report. A user invokes the report by pressing a button of the paywindow display. The customize button 2500 opens the register customize dialog. If a colored dot appears inthe customize button 2500, then a filter is currently active. The output button 2510 opens the output dialog. The done 2520 button closes the report window. The report type listbox 2530 allows a user to select a pre-formatted report type by using the report type combobox. The user can also select any of the fields 2540, 2550, 2560, 2570, 2580 or 2590 to set the report sort field. The selected sort field appears as boldface in the sort field.

.10

15

20

25

30

Report Customize

Figure 26 illustrates a report customize display in accordance with a preferred embodiment. The screen allows a user to create a record filter for transaction records. It provides functionality to save, recall and remove filter(s). Saved filters are shared between the Register and Report functions of the PayWindow. To initiate this display, a user selects the customize button of the report screen. The from date 2692 entry field allows a user to enter a starting date to show the records after this date. The to date 2694 entry field allows a user to enter an ending date to show the records up to and including this date. The item 2690 entry field allows a user to enter a full or substring of the item field as a filter parameter. The received 2684 button allows a user to select a 'received' flag as a filter parameter. The paid 2682 button allows a user to select a 'paid' flag as a filter parameter. The memo field 2680 allows a user to enter a full or substring of the memo field as a filter parameter. A user may select one or more payment methods as a filter parameter utilizing the paid by 2630 box. This multi-selection listbox displays all the payment methods in the wallet for a user to choose from. The merchant box 2640 allows a user to select one or more merchants as a filter parameter. This multiselection listbox displays all of the merchant names in the report for a user to select from. The filters 2600 allow a user to name, store and retrieve filters by using the combobox and selecting, or entering a stored filter name. The memorize 2610 button assigns the name appearing in the filter 2610 box to the parameters specified on the display. The remove 2620 button allows a user to select a filter using the combobox, and delete it. The report header 2660 entry field allows a user to enter information for display as a title for the report. The clear 2670 button allows a user to clear all of the filter parameters. The ok 2650 button activates a filter and closes the

customize dialog. The customize button of the report displays a dot indicating an active filter.

Report Output

Figure 27 is a report output display in accordance with a preferred embodiment. A user can select the output target utilizing this dialog. 5 This display is invoked by selecting the output button 2510 of the report display. A user may select a target of choice using this dialog. A user selects the printer **2710** checkbox if the ouput from the report is targetted for a printer. This action disables all controls under the export button. A user selects the export button 2720 to output the 10 report to an export file. This action enables all export button controls. A user selects a file format for the export operation file utilizing-the pull down menu 2730. A user selects a path/file name for the output file using the path data entry field 2740. The browse button 2750 allows a user to open a file save dialog to browse and set the file path 15 or file name. The cancel button 2770 cancels the operation and closes the dialog. The ok button 2760 closes the dialog and starts the output process.

In an alternative embodiment fo the Register and Report functions described above, a separate financial application program, such as Quicken, could be utilized as a helper application with the internet program. This feature would have the additional advantage of allowing seamless reporting with other financial transactions bundled with the Quicken application. Another alternative embodiment could utilize JPEG format or GIF formatted files for storing and retrieving image files as a compression alternative. These standards are well known in the industry and proven effective for reducing the amount of

storage that is necessary for saving graphic files and bit-mapped images.

Payment Instrument Holders

Figure 28 illustrates various payment instrument holders in accordance with a preferred embodiment. A moneyclip is shown at 2800 and 2802. Various wallets are shown in the closed position at 2810, 2814, 2830 and 2850; and in the open position at 2812, 2816, 2840 and 2860. A purse in the closed position is depicted at 2820 and in the open position at 2822. Finally, a smartcard is shown in the closed position at 2870 and in the open position at 2880. One of ordinary skill in the art will recognize that the depictions are representations of bit mapped images that could be stored as JPEG, GIF or other representations to conserve space.

15

20

25

Certificate Processing

A payment instrument must be certified by a "certificate issuing authority" before it can be used on a computer network. In the case of credit card payments, the issuer may be one of the card issuing banks, but it might also be a merchant (eg SEARS), a transaction aquiring bank or an association such as VISA or Mastercard.

Payment instrument information is stored in the consumer's wallet. The certificate which authorizes the payment instrument will be stored along with that data in a secured database. The process of acquiring a certificate is described below. A certificate can be delivered to a consumer in a preconfigured wallet. The consumer

receives a wallet which contains the certificate together with the necessary details associated with a payment instrument including a payment instrument bitmap which is authorized by a certificate issuing authority or the agencies represented by the issuing authority.

5

10

Obtaining a certificate

A consumer will deliver or cause to be delivered information to a certificate issuing authority. Figure 29 is an illustration of a certificate issuance form in accordance with a preferred embodiment. A user may fill out the form on-line, on paper and mail it in, or get his bank or credit card company to deliver it. The consumer delivered data will usually contain a public key belonging to a security key pair generated by consumer software. The certificate authority takes this information and uses it to validate that the consumer is indeed entitled to use the payment method. This processing normally takes a few days to accomplish. Information will normally be exchanged with the organization issuing the payment method in the physical space if there is one, and with credit agencies. The certificate information is loaded into the consumer's software to enable payment processing to proceed online.

20

25

In some cases the consumer will be able to select details about a payment instument holder (wallet) he desires to own. This may be the icon representing a holder, the access password or other information. After creating the certificate, the issuing authority can use information received in the certificate application to create a custom payment instrument holder ready to use. This payment instrument holder will contain the following information. Payment instrument information including card number 2900 and expiration date 2902. Personal

5

10

15

20

25

information including name 2904, address 2906, social security number 2908 and date of birth 2910.

The associated certificate (eg X509 standard), an associated public key or in some cases public/private key pair (eg RSA), and an approved bitmap representing the payment instrument are provided to the requesting consumer. Figure 30 illustrates a certificate issuance response in accordance with a preferred embodiment. An approved bitmap for a VISA card is shown at 3000. Also the selected payment holder 3010 and the selected payment holder name are provided with the certificate issuance. After the consumer aquires the payment instrument holder 3010, the payment instrument holder is immediately visible to him in his collection of payment instrument holders. Figure 31 illustrates a collection of payment instrument holders in accordance with a preferred embodiment. The predefined payment instrument holder 3100 is the same JOHN's WALLET that was predefined based on defaults by the certificate issuance form. Figure 32 illustrates the default payment instrument bitmap 3200 associated with the predefined payment instrument holder 3210 resulting from the consumer filling in and obtaining approval for a VISA card.

Figure 33 illustrates a selected payment instrument with the issuer provided data shown in a fill in the blanks for the cardholder in accordance with a preferred embodiment. Next time the payment instrument holder is opened in a payment context the certificate issuing authorty's approved instrument bitmap can be used to select the payment instrument and utilize it to make purchases. Figure 34

illustrates a coffee purchase utilizing the newly defined VISA card in accordance with a preferred embodiment of the invention.

CLAIMS

What is claimed is:

1	1.	A method for initiating payment in a computer	r (180-138) with
	•		• • •

- 2 an attached display (138) connected to a network for receiving
- and transmitting network information (134), comprising the
- 4 steps of:
- 5 (a) presenting one or more payment instrument holders (900-920)
- 6 with a closed indicia (110-138, 180-182, 900-920, 138);
- 7 (b) selecting (124, 126) a particular payment instrument holder
- 8 (900); and
- 9 (c) displaying the particular payment instrument holder with an
- open indicia (1060, 180-182, 900-920, 110-138).
- 1 2. The method as recited in claim 1, including the step of
- displaying at least one payment instrument as a bitmap image
- of the payment instrument.
- 1 3. The method as recited in claim 1, including the step of
- 2 presenting an indicia on the display representative of a security
- 3 status.
- 1 4. The method as recited in claim1, including the step of
- 2 presenting an indicia on the display representative of payment
- 3 processing status.
- 1 5. The method as recited in claim 1, including the step of providing
- links to other displays providing additional functions associated
- with processing payment information.

14.5

...

- 1 6. The method as recited in claim 5, including a link that facilitates obtaining an address to ship goods.
- 1 7. The method as recited in claim 5, including a link that
- 2 facilitates reviewing goods associated with the charges.
- 1 8. The method as recited in claim 5, including the step of
- 2 imbedding links to merchants, issuers, sponsors or distributors
- on the display.
- 1 9. The method as recited in claim 1, including the step of defining

- a default payment instrument for each payment instrument
- 3 holder.
- 1 10. The method as recited in claim 1, including the step of
- displaying a list of each transaction that a particular payment
- 3 instrument holder has been used for.
- 1 11. The method as recited in claim 1, including the step of
- prompting for entry of a password (930) to enable use of said
- particular payment instrument holder (110-138, 180-182, 900-
- 4 920, 138).
- 1 12. The method as recited in claim 1, further comprising the step of
- 2 responding to said payment processing initiation by selecting a
- payment instrument utilizing payment parameters stored after a
- 4 recent payment processing.
- 1 13. The method as recited in claim 12, including a link that
- 2 facilitates changing payment instruments.

- The method as recited in claim 12, wherein said payment 14. . 1 2 parameters are based on one or more recent transactions associated with said payment instrument holder. 3 15. The method as recited in claim 12, wherein said payment 1 parameters are based on a recent transaction associated with a 2 payment instrument. 3 16. The method as recited in claim 12, wherein said payment 1 parameters are based on the first transaction associated with a 2 3 payment instrument. The method as recited in claim 1, including the step of utilizing 17. 1 predefined defaults in the selected payment instrument holder 2 3 to perform payment processing. The method as recited in claim 1, including the step of defining 18. 1 2
- 1 18. The method as recited in claim 1, including the step of defining
 2 a default payment instrument in said payment instrument
 3 holder based on a certification form for said payment
 4 instrument.

:2727

!	19.	Apparatus for initiating payment in a computer (110-138) under
2		the control of software (180-882) with an attached display (138)
3		and an input device (124, 126) connected to a network for
4		receiving and transmitting network information (134),
5		comprising:
6	(a)	said computer (110-138) under the control of software (180-882)
7	•	presenting one or more payment instrument holders with a
8		closed indicia (900-920) on said display (138);
9	(b)	said computer (110-138) under the control of software (180-882)
10	` ,	controlling an input device (124, 126) and responding to
11		selection of a particular pormant in the selection of
12	(c)	selection of a particular payment instrument holder (900); and
13	(0)	said computer (110-138) under the control of software (180-882)
		displaying the particular payment instrument holder with an
14		open indicia (1060) on said display (138).
1	20.	The apparatus as recited in claim 19, including a display under
2		the control of said computer under the control of software
3	*	displaying at least one payment instrument as a bitmap image
4		of the payment instrument.
		and payment might differit.
ı	21.	The apparatus as recited in claim 20, wherein the payment
2		instrument is represented in accordance with user defined
3		preferences.

	•	
1	22.	The apparatus as recited in claim 19, wherein the payment
2		instrument is displayed as a bitmap image.
1	23.	The apparatus as recited in claim 19, including means for
2	•	presenting an indicia on the display representative of a security
3 ,		status.
1	24.	The apparatus as recited in claim 19, including said
2		computer under the control of software defining a
3		default payment instrument for each payment instrument
4		holder.
1	25.	The apparatus as recited in claim 19, including said computer
2		under the control of software prompting for entry of a password
3		(930) on said display (138) to check for authorized use of said
4		particular payment instrument.
1 .	26.	The apparatus as recited in claim 19, wherein said computer
2		under the control of software utilizes payment parameters
3	•	stored after a recent payment processing associated with said
4		payment instrument holder to perform payment processing.
1	27.	An apparatus as recited in claim 19, wherein the display
2		includes a link to another display that facilitates changing
3 _	•	payment instruments.
	•	
1	28.	An apparatus as recited in claim 19, wherein said payment
2		parameters are based on recent transactions associated with
3		said payment instrument holder.

processing.

		-78-
2	29.	An apparatus as recited in claim 19, wherein said payment parameters are based on the first transaction associated with a payment instrument.
1 2 3	30.	An apparatus as recited in claim 26, wherein said payment parameters are based on transactions associated with a payment instrument.
1 2 3 4	31.	An apparatus as recited in claim 19, including said computer under the control of software displaying an open payment holder image if access has been granted to the particular payment instrument holder.
1 2 3 4	32.	An apparatus as recited in claim 19, including said computer under the control of software providing links to other displays providing additional functions associated with processing payment information.
?	33.	An apparatus as recited in claim 19, including said computer under the control of software utilizing predefined defaults in the selected payment instrument holder to perform payment

An apparatus as recited in claim 19, including said computer under the control of software defining a default payment instrument in said payment instrument holder based on a certification form for said payment instrument.

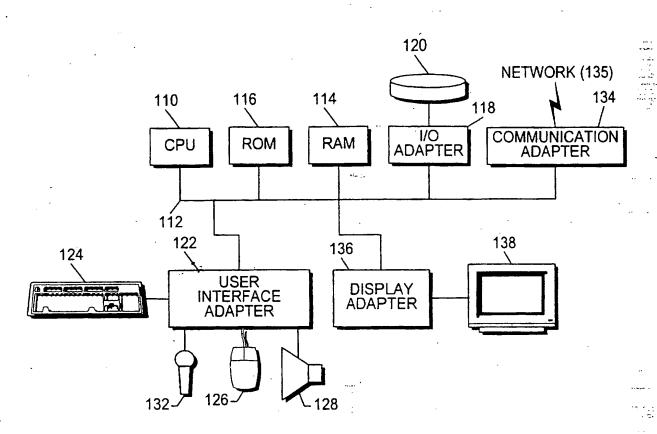


FIG.-1A

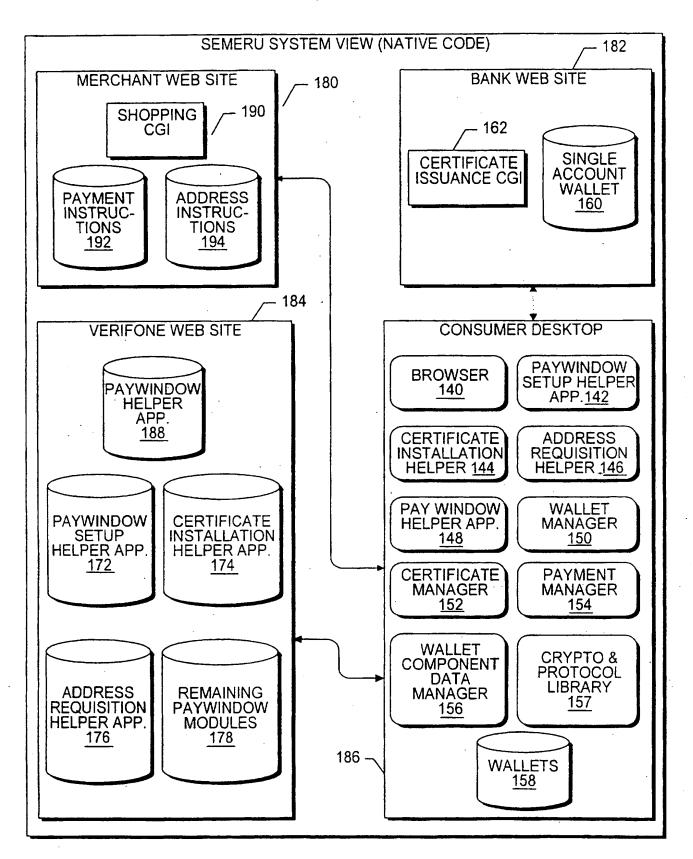


FIG.-1B

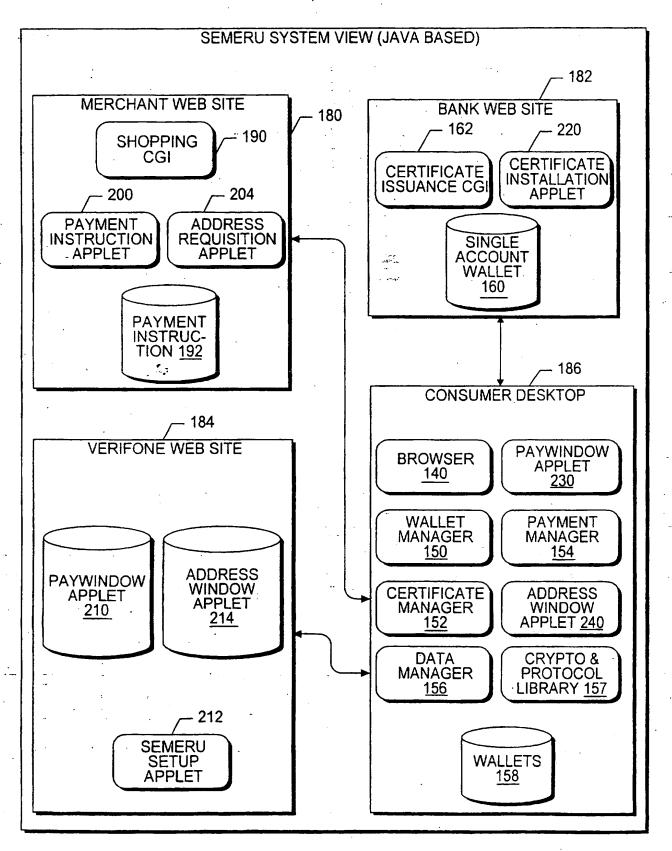


FIG.-2

380

TCP/IP

340

WALLET

FILE

SMART

CARD

WALLET

350

4/26 - 300 SEMERU ARCHITECTURE **BRANDED/GUI APPLICATIONS** WALLET/ PAYWINDOW ETC. RECEIPTS/TRANSACTIONS 308 - 306 MERCHANT'S APPLET WALLET **PAYMENT** CERTIFICATE 302 -OR MIME MESSAGE MANAGER MANAGER MANAGER 304 -**CPCL** - 310 CONSUMER **PAYMENTS CLASS LIBRARY** 312 -314 -SET DATA **PROTOCOL MANAGER** 316 ODBC/JDBC CYBER CASH - 320 **CRYPTO API** 330 -

FIG.-3

360

CRYPTO

SOFTWARE

370

CRYPTO

HARDWARE

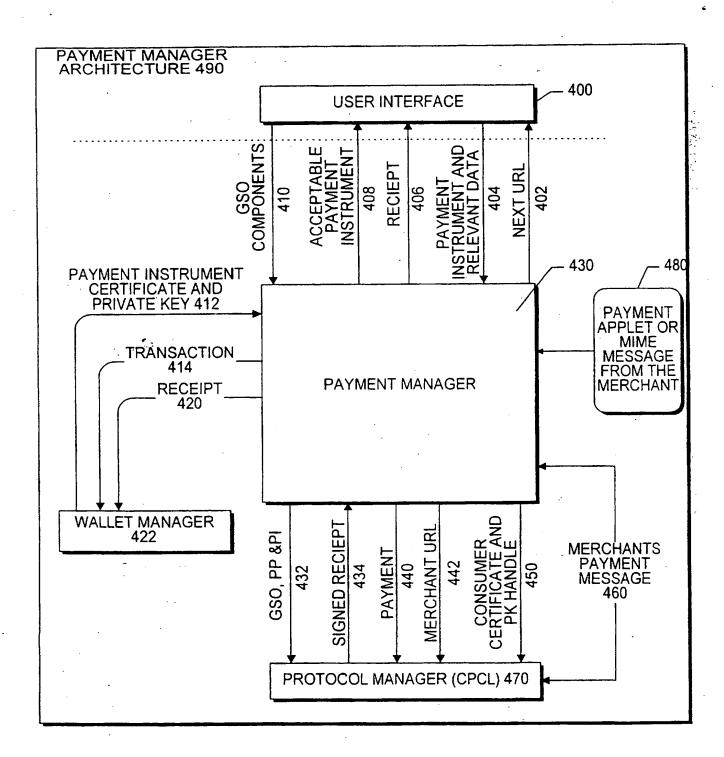


FIG.-4

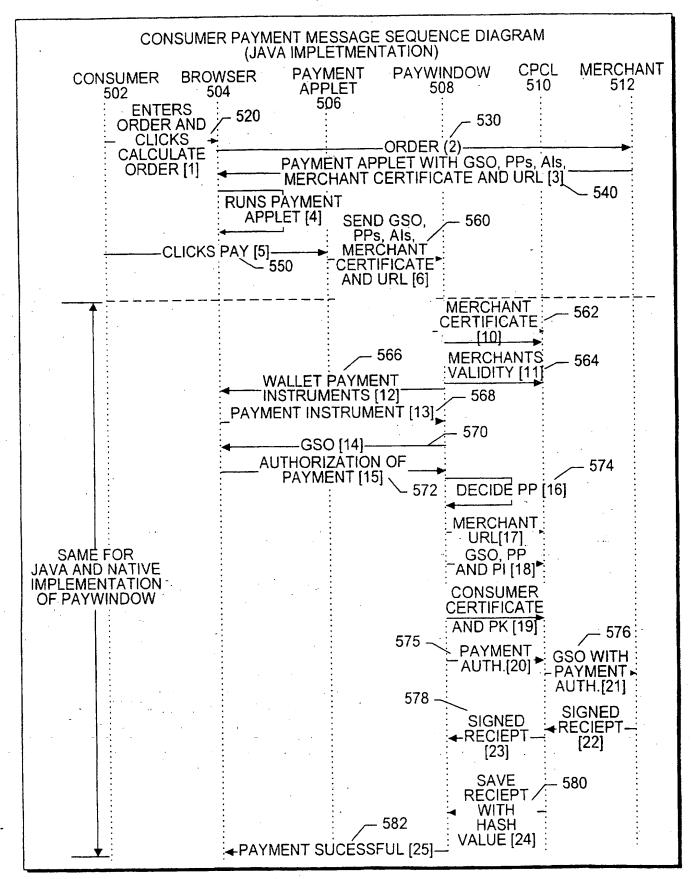
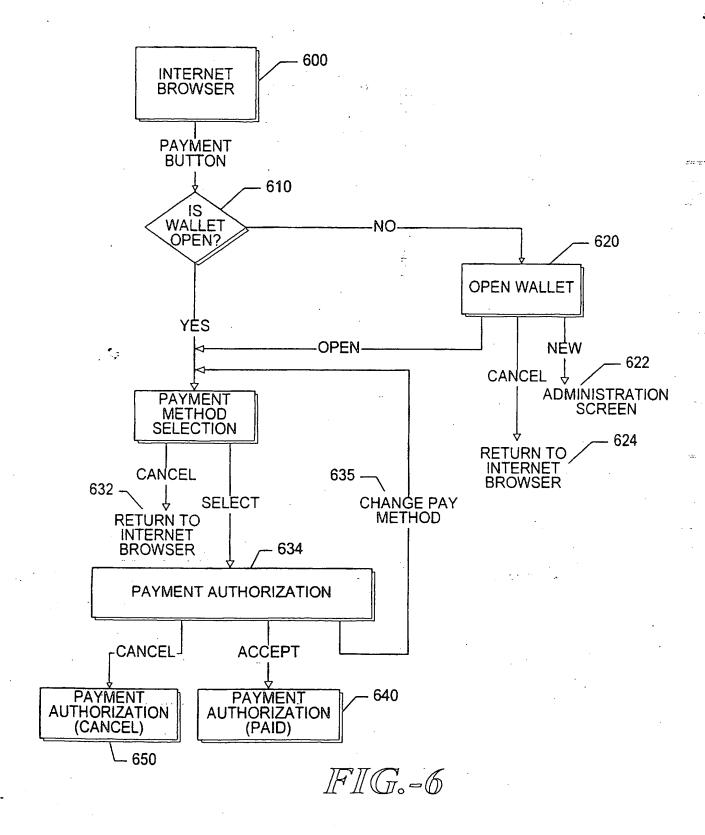
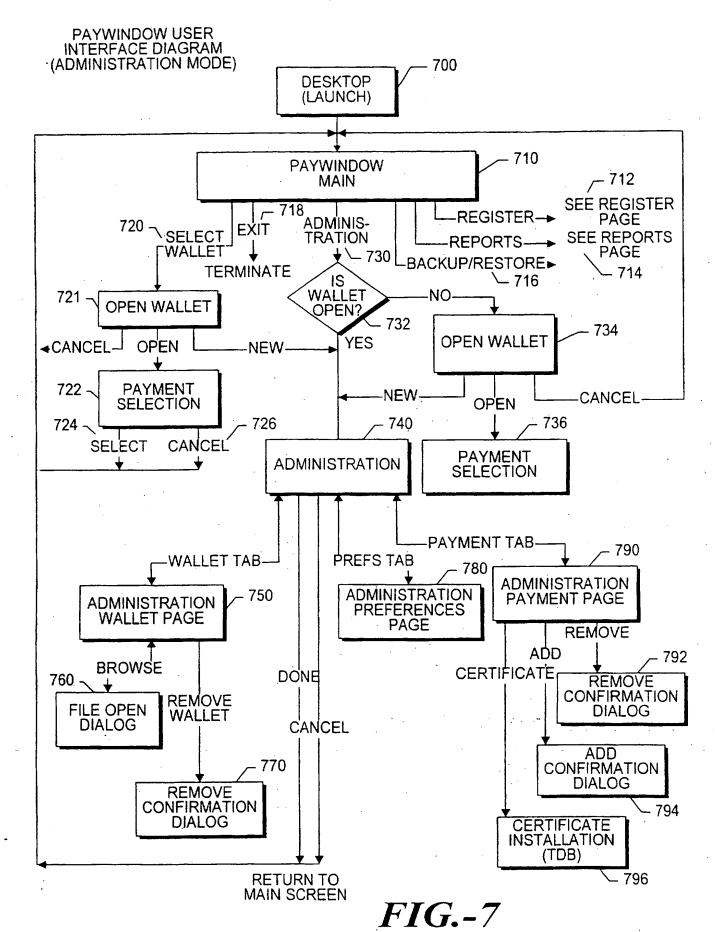


FIG.-5





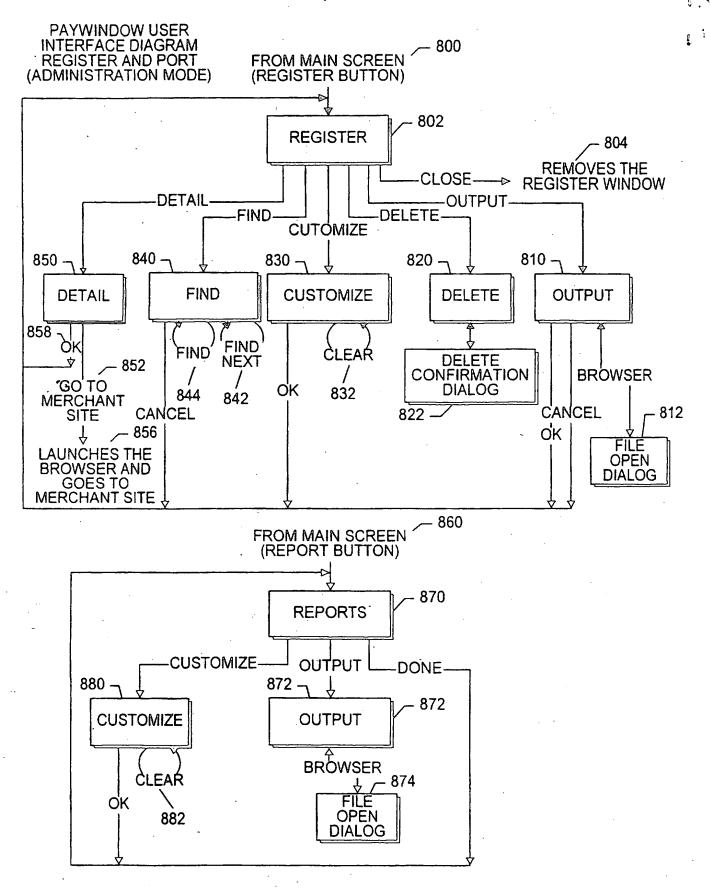


FIG.-8

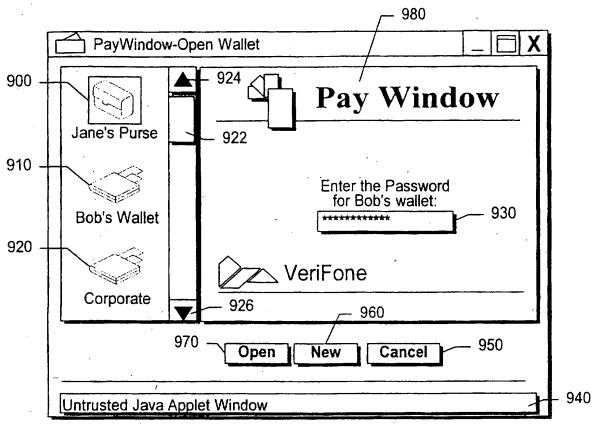


FIG.-9

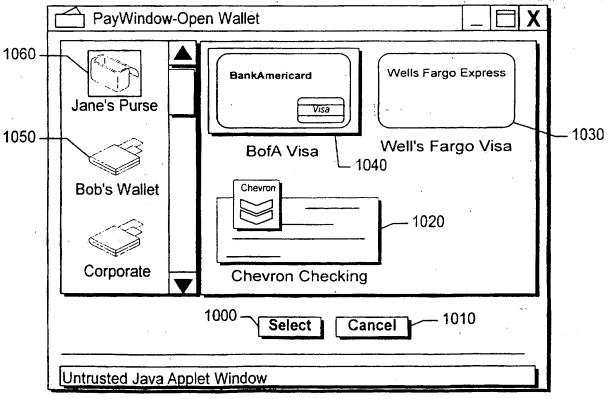


FIG.-10

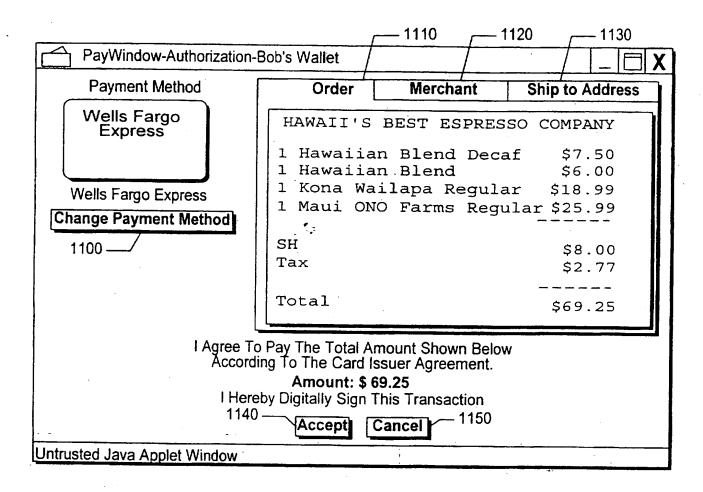


FIG.-11

PayWindow-Authorization-Bob's Wallet 🔲 🗴						
Payment Method	Order	Merchant	Ship to Address			
Wells Fargo Express	HAWAII'S	BEST ESPRES	SO COMPANY			
	1 Hawaiia		\$6.00			
Wells Fargo Express Change Payment Method		ailapa Regula NO Farms Regu	27			
1100	SH Tax		\$8.00 \$2.77			
1200	Total		\$69.25			
The transaction has been completed. Thank you for shopping at HAWAII'S BEST EXPRESSO COMPANY Ok						
Intrusted Java Applet Window						

FIG.-12

	PayWindow-Authorization-Bob's Wallet				
Payment Method	Order	Merchant	Ship to Address		
Wells Fargo Express Wells Fargo Express Change Payment Method	1 Hawaiia 1 Hawaiia 1 Kona Wa	BEST ESPRES: an Blend Deca an Blend ailapa Regula IO Farms Regu	f \$7.50 \$6.00 ar \$18.99		
Payr	Total	Cancel	\$69.25		

FIG.-13

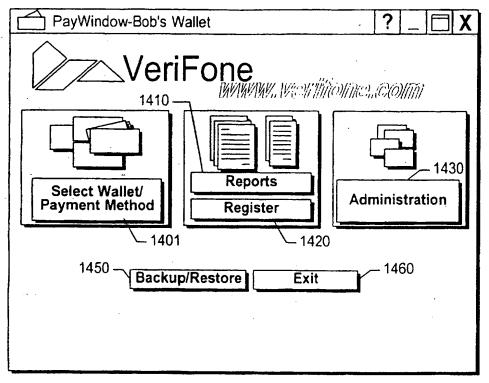


FIG.-14

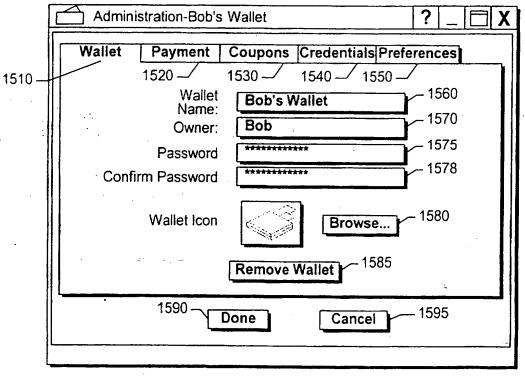


FIG.-15

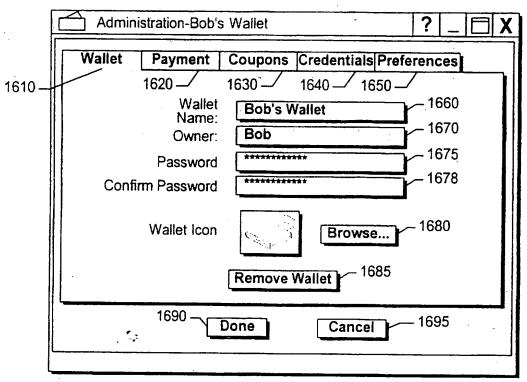


FIG.-16

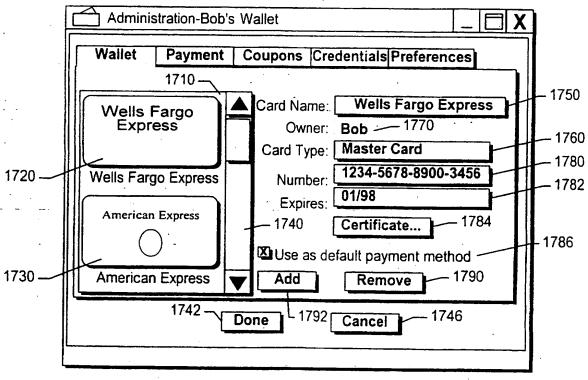


FIG.-17

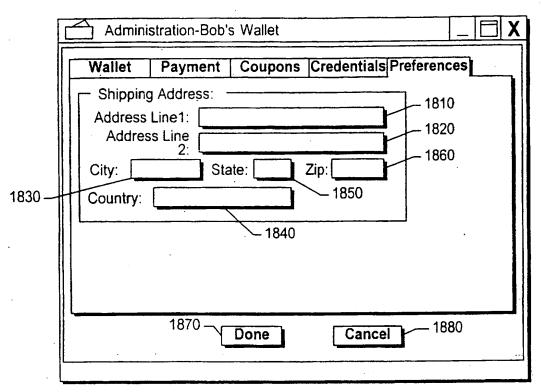


FIG.-18

	1900 — 1910 — X 1920
Wallet Payment Coupons Credentials Pro- Shipping Address: Address Line 1: Address Line 2: City: State: Zip: Country:	eferences
Done Cancel	

FIG.-19

	n-Bob's Wallet					
2080 2082	2084 Payment	_ 2086	<u>_</u> 2088	i 20	70 _ :	207'
Date Time	Instrument	Item	Amount			
3/6/ 96. 10:30AM	Visa: Family	Music CD	12.37	<u></u>	®	A
Memo: Vivaldi's	Ref: 12A-923	Merchant: Tower Records				2
3/7/ 96. 10:20PM	Visa: Family	_	78.45	0	<u> </u>	
Memo:	Ref: A31-001	Merchant: DMV	:	209	90 —	
3/7/ 96. 10:24PM	Visa: Family	Utility Bill	110.90	:®	®	1
Memo:	Ref: 123-09	Merchant: PG&E	; :	:	• • • • • • • •	İ
3/10/ 96. 10:30AM	Visa: Family	Music CD	12.37	:0	0	1
Memo: Beetles	Ref: 13C-321	Merchant: Tower Records	.	:		'
3/10/96 11;15AM	Visa: Family	Hawaiian Blend Decaf	69.25	:0	0	1
Memo:	Ref: 1231	Merchant:HAWAII'S BEST ES		!		1
3/10/96 11:55AM	Business Visa	HP LaserJet 5L	459.55	:0	0	
Memo:	Ref: A11-012	PC Connection		:	• • • • • • • •	
3/11/96 4:50PM	Business Visa	RAM 16M SIMM	249.10	:0	0	
Memo:	Ref:199-001	Merchant: Fry's Electronics		:	• • • • • • • • • • • • • • • • • • • •	
3/11/96 4:59PM	Visa: Family	TurboTax Federal	52.45	0	0	
Memo:	Ref: 130911	Merchant: Intuit	• • • • • • • • • • •	: • :		
3/12/96 6:00PM:	Business Visa	LaserJet 5L Cartridge	45.90	0	0	
Memo:	Ref: A12-006	Merchant: PC		• • • • • • • • • • • • • • • • • • •	• • • • • • •	
3/12/96 6:24PM	Visa: Family		29.50	0	0	
Memo:	Ref: 131009	Merchant: Intuit		•••••	• • • • • • •	
						
	•	•				
					Ì	V
Descil	F:					
Detail	Find Cu	stiomise Delete	Output		Close	•
2010	2020	2030 _2040		2050		- 20

FIG.-20

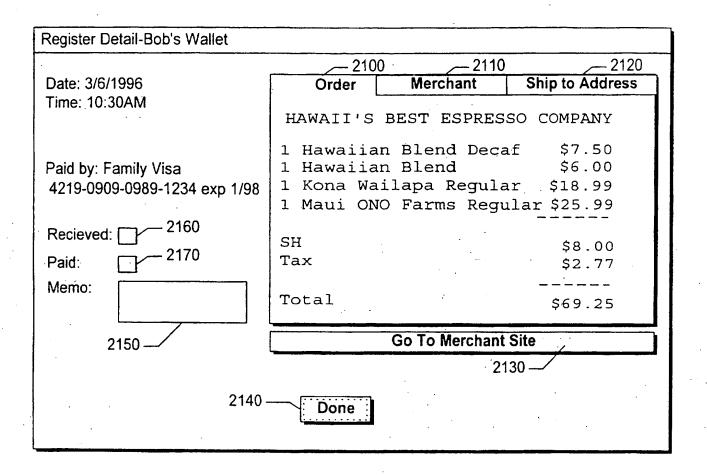


FIG.-21

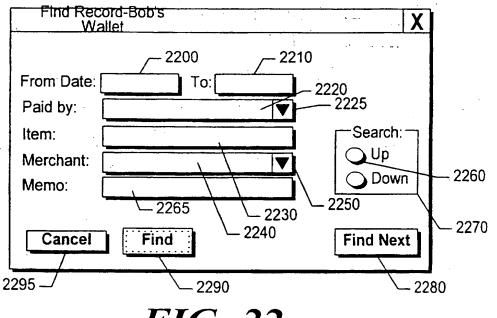


FIG.-22

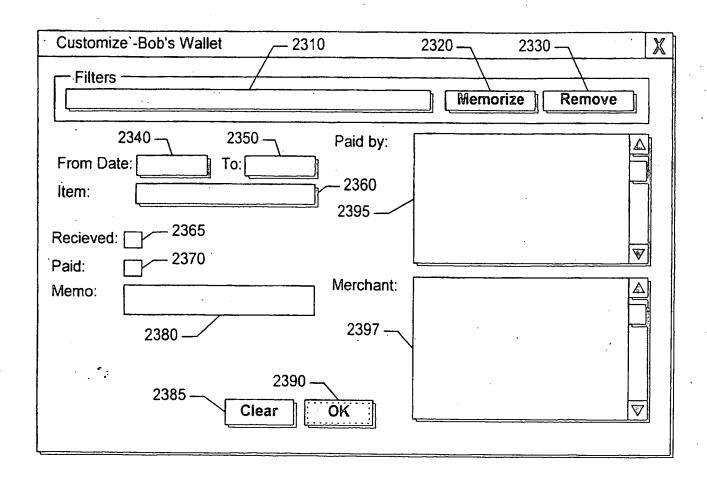


FIG.-23

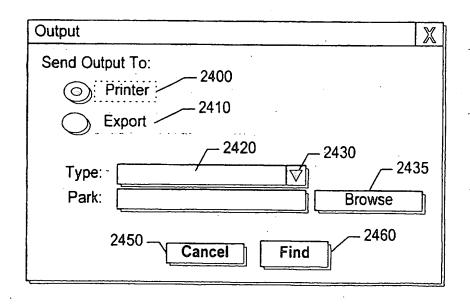


FIG.-24

Report-Bob's Wallet 2530 🔲 🗶						
Report Type:	Report Type: Detail Sorted by Merchant					
<u>2</u>		eport - Bob's Wa : January 1st, 96 to Marc 2560 —		2590 —		
Merchant	Date Time	Payment Method	Amount Paid	Received		
Tower Record	s 1/21/96 10:21AM	Visa Family: Item: Music CD-Mozar Greatest Hits Shipping, Handli Sales Tax	10:00			
Tower Record	Is 2/12/96 6:05PM 	M Visa Family: Item: Music CD- Johannes's Best Shipping, Handli Sales Tax nount Spent at Tower Rec	0.40			
Macy's	1/21/96 10:21AN	N Visa: Family Item: Desk Lamp Shipping, Handl Sales Tax	\$12.20 10.00 ing 1.80 0.40			
Macy's		M Visa: Business Item: Lamy Pen Shipping, Hand Sales Tax nount Spent at Macy's	\$12.20 10.00 ling 1.80 \$24.40			
	Ţ	otal Amount Spent	\$48.80	▼		
-	Customi		Done			
	\	- 2500 - 2510	2520			

FIG.-25

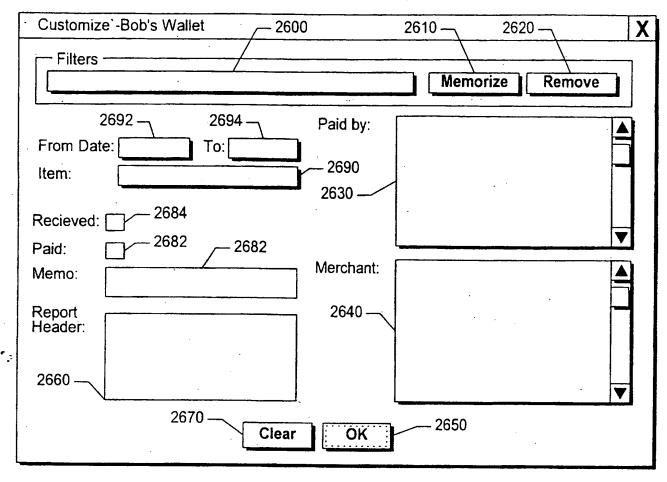


FIG.-26

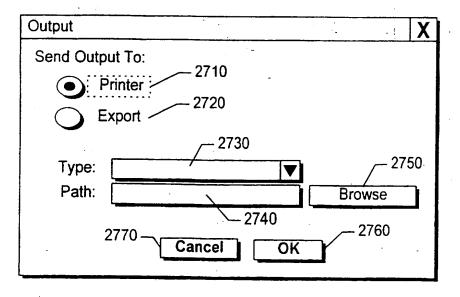


FIG.-27

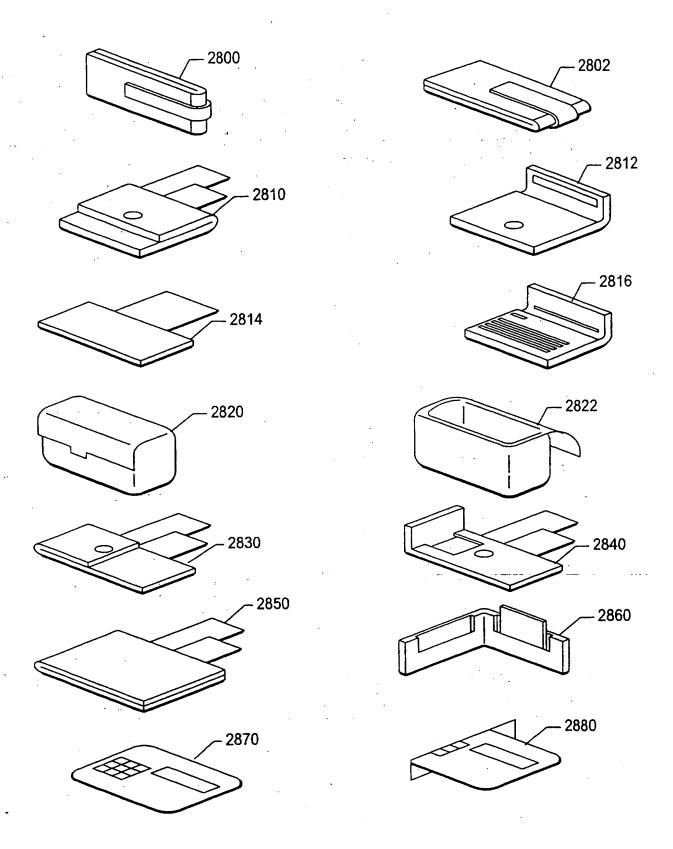


FIG.-28

Netscape [http://kimberly/paywindcertificate.request.htm]							
FILE EDITVIEW GO BOOKMARKS	FILE EDIT VIEW GO BOOKMARKS OPTIONS DIRECTORY WINDOW HELP						
A LUCYEL EDIT RE							
LOCATION http://kimberly/paywi	rindow/verisign certificate request.htm						
	ook Net Search Net Directory Software						
	cate Issuance Form Il fields If a field does not apply to you, enter N/A						
2900 Card Information							
	117 2222 3333 9191						
2902 Expiry Date 12	2/98						
Personal Information							
First Name Jo	hn 2904						
<u> </u>	nith						
Home Phone #	1 222-3333 (example:555 555-5555 + 2912						
F	1-22-3333 (example: 999-99-999) 2908						
<u> </u>	2/12/72 (month/day/year as 01/23/50) 2910						
	nes (for security purposes only)						
L. Monder's Mandell Manie	(tot security purposes only)						
Address	2906						
Line 1 141-22 Long Drive							
Line2 Kensington							
Apt. #							
City Palo Alto	State [CA] Zip [94025]						
VeriFone Wallet Info	VeriFone Wallet Information						
Icon Preference	Wallet ▼						
1 assword	2932						
Confirm Password ****							
Document Done							

FIG.-29

	Netscape [Verisign Cettificate Request Response]						
FILE EDITVI	EW GO BOOKMARKS OPTIONS DIRECTORY WINDOW HELP						
	HOME EDIT RE-LOAD IMAGE OPEN PRINT FIND STOP						
LOCATION What's New!	http://kimberly/cgi-win/paywindowdemo/bank.exe?CR [What's Cool!] [Handbook] [Net Search] [Net Directory] [Software]						
	Certificate Issuance Response	_					
Your request you with the	for a certificate has been approved. A VeriFone wallet has been created for following information: Wallet Name John's Wallet 3020 3010 3010						
	Credit Card Name First USA Visa Credit Card Number 4417 2222 3333 9191 Credit Card Icon						
٠.	Click to install you new Verifone Wallet						

FIG.-30

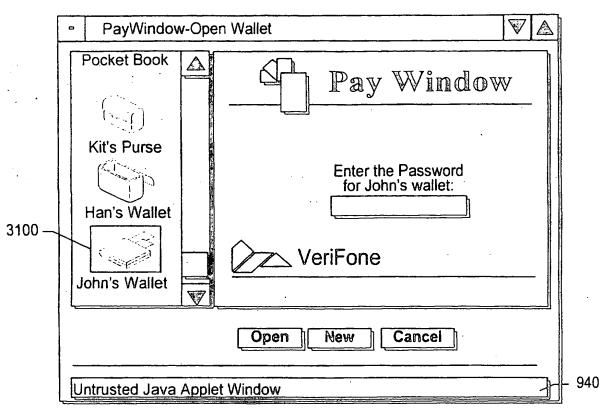


FIG.-31

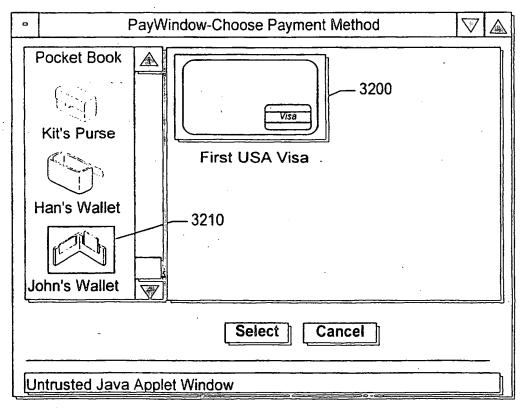


FIG.-32

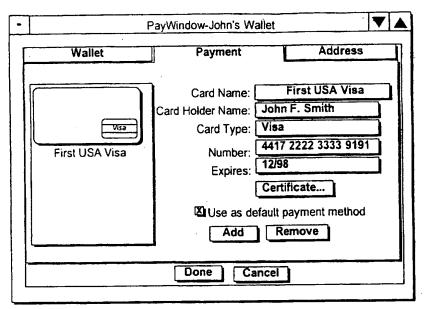


FIG.-33

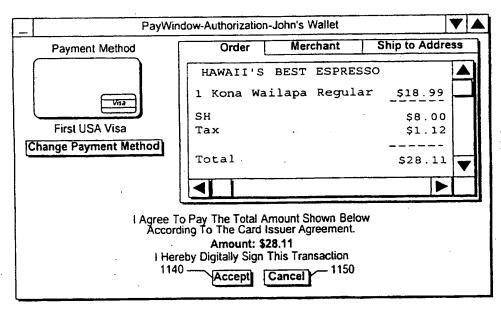


FIG.-34

INTERNATIONAL SEARCH REPORT

In .tional Application No PCT/US 97/06940

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 G07F7/10							
According to	o International Patent Classification (IPC) or to both national classification	fication and IPC					
	SEARCHED						
IPC 6	ocumentation scarched. (classification system followed by classification G07F	tion symbols)					
	tion searched other than minimum documentation to the extent that	and documents are included in the fields se	arched				
Documental	non searched other than minimum documentation to the extent that	such documents are included in the new se	a				
	•	·					
Electronic d	lata base consulted during the international search (name of data ba	se and, where practical, search terms used)					
C. DOCUM	MENTS CONSIDERED TO BE RELEVANT	<u></u>					
Category *	Citation of document, with indication, where appropriate, of the r	relevant passages	Relevant to claim No.				
Х	EP 0 527 639 A (U S ORDER INC) 1 1993	7 February	1,2,5, 11,19, 20,25				
A	see claim 1; figures 1,4		3,4, 6-10,				
	·		12-18, 21-24, 26-34				
			20-34				
		-/					
İ							
X Furt	ther documents are listed in the continuation of box C.	X Patent family members are listed in	n annex.				
* Special ca	stegories of cited documents:	"T" later document published after the inte- or priority date and not in conflict wi	mational filing date				
	nent defining the general state of the art which is not dered to be of particular relevance	ated to understand the principle or th	eory underlying the				
filing		"X" document of particular relevance; the cannot be considered novel or cannot	be considered to				
"L" document which may throw doubts on priority claim(s) or involve an inventive step when the document is taken alone which is cited to establish the publication date of another "Y" document of particular relevance; the claimed invention							
citation or other special reason (as specified) Cannot be considered to involve an inventive step when the document referring to an oral disclosure, use, exhibition or other means document is combined with one or more other such document, such combination being obvious to a person skilled							
'P' document published prior to the international filing date but in the art. later than the priority date claimed '&' document member of the same patent family							
Date of the actual completion of the international search Date of mailing of the international search report							
18 September 1997 03. 10. 97							
Name and mailing address of the ISA Authorized officer							
	European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,						
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3016 Kirsten, K							

INTERNATIONAL SEARCH REPORT

It attonal Application No
PCT/US 97/06940

CIConnec	OVCHAPATE CONTROL	PCT/US 97/06940	
Category *	Quation of documents considered to be relevant		
	Citation of document, with indication, where appropriate, of the relevant passages		Relevant to claim No.
X	DIGEST OF PAPERS OF THE COMPUTER SOCIETY COMPUTER CONFERENCE (SPRING) COMPCON, TECHNOLOGIES FOR THE INFORMATION SUPERHIGHWAY SAN FRANCISCO, MAR. 5 - 9, 1995,		1,2,19, 20
	no. CONF. 40, 5 March 1995, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 20-25, XP000577034 SIRBU M ET AL: "NETBILL: AN INTERNET COMMERCE SYSTEM OPTIMIZED FOR NETWORK DELIVERED SERVICES"		
4	see figures 1,2		3-18, 21-34
4	WO 95 26085 A (INNOVONICS INC ;CLARK DERECK B (US)) 28 September 1995 see claim 1; figures 1,2		1-34
\	EP 0 644 513 A (AT & T CORP) 22 March 1995 see claim 1; figure 8	•	1-34
	WO 92 11598 A (MOTOROLA INC) 9 July 1992 see claim 1; figures 1,4		1-34
	BYTE, vol. 20, no. 6, 1 June 1995, pages 71/72, 74, 76-78, XP000509328 SINGLETON A: "CASH ON THE WIREHEAD"		1-34
			•
			·
			•
			* · · · · · · · · · · · · · · · · · · ·
		. '	
			. •

1

INTERNATIONAL SEARCH REPORT

Information on patent family members

In Itional Application No PCT/US 97/06940

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0527639 A	17-02-93	AU 1264292 A CA 2054836 A WO 9304435 A	16-03-93 15-02-93 04-03-93
WO 9526085 A	28-09-95	US 5517569 A AU 2190295 A CA 2185697 A EP 0750812 A	14-05-96 09-10-95 28-09-95 02-01-97
EP 0644513 A	22-03-95	US 5544246 A CA 2131510 A JP 7152837 A NO 943457 A	06-08-96 18-03-95 16-06-95 20-03-95
WO 9211598 A	09-07-92	CA 2096730 A,C EP 0564469 A JP 6501329 T KR 9707003 B US 5221838 A	25-06-92 13-10-93 10-02-94 01-05-97 22-06-93